

Screening Level Risk Assessment Package *Mormackite*









National Oceanic and Atmospheric Administration

Office of National Marine Sanctuaries Daniel J. Basta, Director Lisa Symons John Wagner

Office of Response and Restoration Dave Westerholm, Director Debbie Payton Doug Helton

Photo: Photograph of a C2-S-B1 Type Liberty Ship, this is not a photograph of Mormackite Source: http://www.usmm.org/c2ships.html





Table of Contents

Project Background	ii
Executive Summary	1
Section 1: Vessel Background Information: Remediation of Underwater Legacy	
Environmental Threats (RULET)	2
Vessel Particulars	
Casualty Information	
Wreck Location	
Casualty Narrative	
General Notes	
Wreck Condition/Salvage History	
Archaeological Assessment	
Assessment	
Background Information References	
Vessel Risk Factors	
Section 2: Environmental Impact Modeling	12
Release Scenarios Used in the Modeling	12
Oil Type for Release	14
Oil Thickness Thresholds	
Potential Impacts to the Water Column	
Potential Water Surface Slick	
Potential Shoreline Impacts	
Section 3: Ecological Resources At Risk	10
-	
Ecological Risk Factors	21
Section 4: Socio-Economic Resources At Risk	26
Socio-Economic Risk Factors	28
Section 5: Overall Risk Assessment and Recommendations for Assessment,	
Monitoring, or Remediation	22
wontoning, of Remediation	

Project Background

The past century of commerce and warfare has left a legacy of thousands of sunken vessels along the U.S. coast. Many of these wrecks pose environmental threats because of the hazardous nature of their cargoes, presence of munitions, or bunker fuel oils left onboard. As these wrecks corrode and decay, they may release oil or hazardous materials. Although a few vessels, such as USS *Arizona* in Hawaii, are well-publicized environmental threats, most wrecks, unless they pose an immediate pollution threat or impede navigation, are left alone and are largely forgotten until they begin to leak.

In order to narrow down the potential sites for inclusion into regional and area contingency plans, in 2010, Congress appropriated \$1 million to identify the most ecologically and economically significant potentially polluting wrecks in U.S. waters. This project supports the U.S. Coast Guard and the Regional Response Teams as well as NOAA in prioritizing threats to coastal resources while at the same time assessing the historical and cultural significance of these nonrenewable cultural resources.


The potential polluting shipwrecks were identified through searching a broad variety of historical sources. NOAA then worked with Research Planning, Inc., RPS ASA, and Environmental Research Consulting to conduct the modeling forecasts, and the ecological and environmental resources at risk assessments.

Initial evaluations of shipwrecks located within American waters found that approximately 600-1,000 wrecks could pose a substantial pollution threat based on their age, type and size. This includes vessels sunk after 1891 (when vessels began being converted to use oil as fuel), vessels built of steel or other durable material (wooden vessels have likely deteriorated), cargo vessels over 1,000 gross tons (smaller vessels would have limited cargo or bunker capacity), and any tank vessel.

Additional ongoing research has revealed that 87 wrecks pose a potential pollution threat due to the violent nature in which some ships sank and the structural reduction and demolition of those that were navigational hazards. To further screen and prioritize these vessels, risk factors and scores have been applied to elements such as the amount of oil that could be on board and the potential ecological or environmental impact.

Executive Summary: Mormackite

The freighter *Mormackite*, sunk during storm off the coast of North Carolina in 1942, was identified as a potential pollution threat, thus a screening-level risk assessment was conducted. The different sections of this document summarize what is known about the *Mormackite*, the results of environmental impact modeling composed of different release scenarios, the ecological and socioeconomic resources that would be at risk in the event of releases, the screening-level risk scoring results and

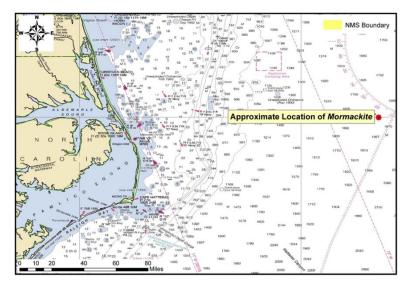

overall risk assessment, and recommendations for assessment, monitoring, or remediation.

Based on this screening-level assessment, each vessel was assigned a summary score calculated using the seven risk criteria described in this report. For the Worst Case Discharge, Mormackite scores Medium with 13 points; for the Most Probable Discharge (10% of the Worse Case volume), Mormackite also scores Medium with 12 points. Given these scores, NOAA would typically recommend that this site be considered for further assessment to determine the vessel condition, amounts of oil onboard, and feasibility of oil removal action. However, given the range in the level of data certainty and that the location of this vessel is unknown, NOAA recommends that surveys of opportunity with state, federal, or academic entities be used to attempt to locate this vessel and that general notations are made in the Area Contingency Plans so that if a mystery spill is reported in the general area, this vessel could be investigated as a source. Outreach efforts with commercial fishermen who frequent the area would be helpful to gain awareness of localized spills in the general area where the vessel is believed lost.

Ve	Ris	k Score				
	A1: Oil Volume (total bbl)					
	A2: Oil Type					
Pollution	B: Wreck Clearance					
Potential	C1: Burning of the Ship		High			
Factors	C2: Oil on Water					
	D1: Nature of Casualty					
	D2: Structural Breakup					
Archaeological Assessment	Archaeological Assessment	Not	Scored			
	Wreck Orientation					
	Depth					
	Confirmation of Site Condition					
Operational Factors	Other Hazardous Materials	rials Not Scored				
	Munitions Onboard					
	Gravesite (Civilian/Military)					
	Historical Protection Eligibility					
		WCD	MP (10%)			
	3A: Water Column Resources	Low	Low			
Ecological Resources	3B: Water Surface Resources	High	Med			
	3C: Shore Resources	Low	Low			
Socio-	4A: Water Column Resources	Low	Low			
Economic	4B: Water Surface Resources	Med	Med			
Resources	4C: Shore Resources	Med Med				
Summary Risk S	cores	13	12			

The determination of each risk factor is explained in the document. This summary table is found on page 34.

SECTION 1: VESSEL BACKGROUND INFORMATION: REMEDIATION OF UNDERWATER LEGACY ENVIRONMENTAL THREATS (RULET)

Vessel Particulars

Official Name: Mormackite

Official Number: 247736

Vessel Type: Freighter

Vessel Class: C2-S-B1 Type Liberty Ship

(6,214 gross ton class)

Former Names: Wild Rover

Year Built: 1945

Builder: Moore Dry Dock Company, Oakland, CA

Builder's Hull Number: 301

Flag: American

Owner at Loss: Moore-McCormack Line

Controlled by: Unknown Chartered to: Unknown

Operated by: Unknown

Homeport: Unknown

Length: 438 feet **Beam:** 63 feet **Depth:** 27 feet

Gross Tonnage: 6,195 Net Tonnage: 3,589

Hull Material: Steel Hull Fastenings: Welded Powered by: Oil-fired steam

Bunker Type: Heavy fuel oil (Bunker C) **Bunker Capacity (bbl):** 10,990

Average Bunker Consumption (bbl) per 24 hours: Unknown

Liquid Cargo Capacity (bbl): Unknown Dry Cargo Capacity: 444,000 cubic feet

Tank or Hold Description: Vessel is a standard C-2 type vessel with five hatches and deep tanks in Nos. 2 and 4 holds and two between decks in Nos. 1, 2, 3, and 4 hatches and one between deck in No. 5 hatch.

Casualty Information

Port Departed: Victoria, Brazil Destination Port: Baltimore, MD

Number of Days Sailing: ≈ 13 Cause of Sinking: Storm

Latitude (DD): 36.0001 **Longitude (DD):** -73.29951

Nautical Miles to Shore: 132 Nautical Miles to NMS: 140

Nautical Miles to MPA: 0 Nautical Miles to Fisheries: Unknown

Approximate Water Depth (Ft): 11,890 Bottom Type: Sand-silt/clay

Is There a Wreck at This Location? Unknown, the wreck has never been located or surveyed

Wreck Orientation: Unknown

Vessel Armament: None

Cargo Carried when Lost: 9,003 tons of iron ore and 30 tons of bagged cocoa beans

Cargo Oil Carried (bbl): 0 Cargo Oil Type: N/A

Probable Fuel Oil Remaining (bbl): ≤ 5,145 **Fuel Type:** Heavy fuel oil (Bunker C)

Total Oil Carried (bbl): ≤ 5,145 **Dangerous Cargo or Munitions:** No

Munitions Carried: None

Demolished after Sinking: No Salvaged: No

Cargo Lost: Yes Reportedly Leaking: No

Historically Significant: Unknown Gravesite: Yes

Salvage Owner: Not known if any

Wreck Location

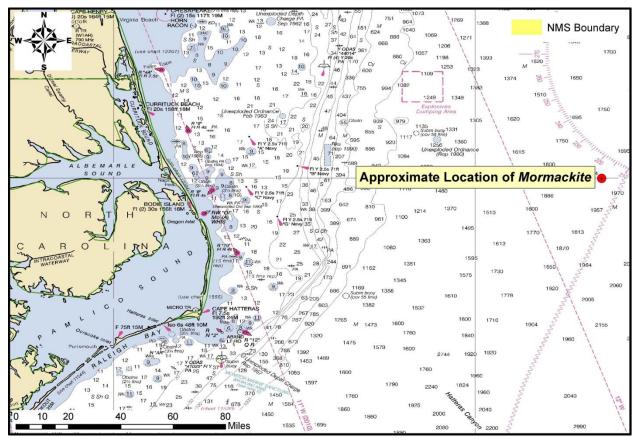


Chart Number: 13003

Casualty Narrative

"At about 9:45 a.m., 7 October 1954, the SS MORMACKITE, while enroute from the port of Victoria, Brazil, to Baltimore, MD, sank after taking a marked port list. On board were 43 persons, all of which were vessel's personnel. Eleven Survived, twelve bodies were recovered, and twenty-five are missing and presumed dead..."

-http://www.uscg.mil/hq/cg5/docs/boards/mormackite.pdf

General Notes

AWOIS Data:

DESCRIPTION

NO. 8183; CARGO, 6195 GT; SUNK 1954; POS. ACCURACY 3-5 MILES.

SURVEY REQUIREMENTS NOT DETERMINED.

Wreck Condition/Salvage History

Unknown; wreck has never been located.

Archaeological Assessment

The archaeological assessment provides additional primary source based documentation about the sinking of vessels. It also provides condition-based archaeological assessment of the wrecks when possible. It does not provide a risk-based score or definitively assess the pollution risk or lack thereof from these vessels, but includes additional information that could not be condensed into database form.

Where the current condition of a shipwreck is not known, data from other archaeological studies of similar types of shipwrecks provide the means for brief explanations of what the shipwreck might look like and specifically, whether it is thought there is sufficient structural integrity to retain oil. This is more subjective than the Pollution Potential Tree and computer-generated resource at risk models, and as such provides an additional viewpoint to examine risk assessments and assess the threat posed by these shipwrecks. It also addresses questions of historical significance and the relevant historic preservation laws and regulations that will govern on-site assessments.

In some cases where little additional historic information has been uncovered about the loss of a vessel, archaeological assessments cannot be made with any degree of certainty and were not prepared. For vessels with full archaeological assessments, NOAA archaeologists and contracted archivists have taken photographs of primary source documents from the National Archives that can be made available for future research or on-site activities.

Assessment

The wreck of *Mormackite* has never been located so there are no site reports that would allow NOAA archaeologists to provide a condition based archaeological assessment of the shipwreck. This means that the best assessment on the sinking of the ship probably still comes from the U.S. Coast Guard's Marine Board of Investigation Report written about the foundering of this vessel. Given the distance from shore that this vessel sank, the depth of water the ship sank in, and the fact that the ship only had a maximum of 5,145 bbl of bunker oil onboard it is unlikely that the shipwreck will be intentionally located.

Ongoing research also strongly suggests that vessels in great depths of water are generally found in an upright orientation. This orientation has often lead to loss of oil from vents and piping long before loss of structural integrity of hull plates from corrosion or other physical impacts. As it is believed that this vessel is in water greater than 11,000 feet, it is likely to have settled upright and may no longer contain oil.

The only way to conclusively determine the condition of the shipwreck, however, will be to examine the site if it is ever discovered. Should the vessel be located in a survey of opportunity or due to a mystery spill attributed to this vessel, it should be noted that this vessel is potentially of historic significance and will require appropriate actions be taken under the National Historic Preservation Act (NHPA) prior to any actions that could impact the integrity of the vessel. This vessel may be eligible for listing on the National Register of Historic Places. The site is also considered a gravesite and appropriate actions should be undertaken to minimize disturbance to the site.

Background Information References

Vessel Image Sources: http://www.usmm.org/c2ships.html

Construction Diagrams or Plans in RULET Database? No

Text References:

-AWOIS database

-http://www.uscg.mil/hq/cg5/docs/boards/mormackite.pdf

Vessel Risk Factors

In this section, the risk factors that are associated with the vessel are defined and then applied to the *Mormackite* based on the information available. These factors are reflected in the pollution potential risk assessment development by the U.S. Coast Guard Salvage Engineering Response Team (SERT) as a means to apply a salvage engineer's perspective to the historical information gathered by NOAA. This analysis reflected in Figure 1-1 is simple and straightforward and, in combination with the accompanying archaeological assessment, provides a picture of the wreck that is as complete as possible based on current knowledge and best professional judgment. This assessment *does not* take into consideration operational constraints such as depth or unknown location, but rather attempts to provide a replicable and objective screening of the historical date for each vessel. SERT reviewed the general historical information available for the database as a whole and provided a stepwise analysis for an initial indication of Low/Medium/High values for each vessel.

In some instances, nuances from the archaeological assessment may provide additional input that will amend the score for Section 1. Where available, additional information that may have bearing on operational considerations for any assessment or remediation activities is provided.

Each risk factor is characterized as High, Medium, or Low Risk or a category-appropriate equivalent such as No, Unknown, Yes, or Yes Partially. The risk categories correlate to the decision points reflected in Figure 1-1.

Each of the risk factors also has a "data quality modifier" that reflects the completeness and reliability of the information on which the risk ranks were assigned. The quality of the information is evaluated with respect to the factors required for a reasonable preliminary risk assessment. The data quality modifier scale is:

- **High Data Quality:** All or most pertinent information on wreck available to allow for thorough risk assessment and evaluation. The data quality is high and confirmed.
- **Medium Data Quality:** Much information on wreck available, but some key factor data are missing or the data quality is questionable or not verified. Some additional research needed.
- Low Data Quality: Significant issues exist with missing data on wreck that precludes making preliminary risk assessment, and/or the data quality is suspect. Significant additional research needed.

Was there oil onboard? Yes or? Was the wreck **Low Pollution Risk** demolished? No or ? Yes Was significant cargo Likely all cargo lost? lost during casualty? (Research) No or ? No or ? Is cargo area **Medium Pollution Risk** damaged? (Research) No or ? **High Pollution Risk**

Pollution Potential Tree

Figure 1-1: U.S. Coast Guard Salvage Engineering Response Team (SERT) developed the above Pollution Potential Decision Tree.

In the following sections, the definition of low, medium, and high for each risk factor is provided. Also, the classification for the *Mormackite* is provided, both as text and as shading of the applicable degree of risk bullet.

Pollution Potential Factors

Risk Factor A1: Total Oil Volume

The oil volume classifications correspond to the U.S. Coast Guard spill classifications:

• **Low Volume: Minor Spill** <240 bbl (10,000 gallons)

- **Medium Volume: Medium Spill** \geq 240 2,400 bbl (100,000 gallons)
- **High Volume: Major Spill** $\geq 2,400$ bbl ($\geq 100,000$ gallons)

The oil volume risk classifications refer to the volume of the most-likely Worst Case Discharge from the vessel and are based on the amount of oil believed or confirmed to be on the vessel.

The *Mormackite* is ranked as High Volume because it is thought to have a potential for up to 5,145 bbl based on the amount of fuel the vessel was recorded as carrying before its loss, although some of that may have been lost during the casualty or after the vessel sank. Data quality is medium.

The risk factor for volume also incorporates any reports or anecdotal evidence of actual leakage from the vessel or reports from divers of oil in the overheads, as opposed to potential leakage. This reflects the history of the vessel's leakage. There are no reports of leakage from the *Mormackite*.

Risk Factor A2: Oil Type

The oil type(s) on board the wreck are classified only with regard to persistence, using the U.S. Coast Guard oil grouping¹. (Toxicity is dealt with in the impact risk for the Resources at Risk classifications.) The three oil classifications are:

- Low Risk: Group I Oils non-persistent oil (e.g., gasoline)
- **Medium Risk: Group II III Oils** medium persistent oil (e.g., diesel, No. 2 fuel, light crude, medium crude)
- **High Risk: Group IV** high persistent oil (e.g., heavy crude oil, No. 6 fuel oil, Bunker C)

The *Mormackite* is classified as High Risk because the cargo is heavy fuel oil, a Group IV oil type. Data quality is high.

Was the wreck demolished?

Risk Factor B: Wreck Clearance

This risk factor addresses whether or not the vessel was historically reported to have been demolished as a hazard to navigation or by other means such as depth charges or aerial bombs. This risk factor is based on historic records and does not take into account what a wreck site currently looks like. The risk categories are defined as:

- Low Risk: The wreck was reported to have been entirely destroyed after the casualty
- **Medium Risk:** The wreck was reported to have been partially cleared or demolished after the casualty
- **High Risk:** The wreck was not reported to have been cleared or demolished after the casualty
- Unknown: It is not known whether or not the wreck was cleared or demolished at the time of or after the casualty

¹ Group I Oil or Nonpersistent oil is defined as "a petroleum-based oil that, at the time of shipment, consists of hydrocarbon fractions: At least 50% of which, by volume, distill at a temperature of 340°C (645°F); and at least 95% of which, by volume, distill at a temperature of 370°C (7700°F)."

Group II - Specific gravity less than 0.85 crude [API° >35.0]

Group III - Specific gravity between 0.85 and less than .95 [API° ≤35.0 and >17.5]

Group IV - Specific gravity between 0.95 to and including 1.0 [API° ≤17.5 and >10.0]

The *Mormackite* is classified as High Risk because there are no known historic accounts of the wreck being demolished as a hazard to navigation. Data quality is high.

Was significant cargo or bunker lost during casualty?

Risk Factor C1: Burning of the Ship

This risk factor addresses any burning that is known to have occurred at the time of the vessel casualty and may have resulted in oil products being consumed or breaks in the hull or tanks that would have increased the potential for oil to escape from the shipwreck. The risk categories are:

- Low Risk: Burned for multiple days
- **Medium Risk:** Burned for several hours
- **High Risk:** No burning reported at the time of the vessel casualty
- Unknown: It is not known whether or not the vessel burned at the time of the casualty

The *Mormackite* is classified as High Risk because there was no report of fire at the time of casualty. Data quality is high.

Risk Factor C2: Reported Oil on the Water

This risk factor addresses reports of oil on the water at the time of the vessel casualty. The amount is relative and based on the number of available reports of the casualty. Seldom are the reports from trained observers so this is very subjective information. The risk categories are defined as:

- Low Risk: Large amounts of oil reported on the water by multiple sources
- Medium Risk: Moderate to little oil reported on the water during or after the sinking event
- **High Risk:** No oil reported on the water
- Unknown: It is not known whether or not there was oil on the water at the time of the casualty

The *Mormackite* is classified as High Risk because no oil is known to have been reported spreading across the water as the vessel went down. Data quality is high.

Is the cargo area damaged?

Risk Factor D1: Nature of the Casualty

This risk factor addresses the means by which the vessel sank. The risk associated with each type of casualty is determined by the how violent the sinking event was and the factors that would contribute to increased initial damage or destruction of the vessel (which would lower the risk of oil, other cargo, or munitions remaining on board). The risk categories are:

- Low Risk: Multiple torpedo detonations, multiple mines, severe explosion
- **Medium Risk:** Single torpedo, shellfire, single mine, rupture of hull, breaking in half, grounding on rocky shoreline
- **High Risk:** Foul weather, grounding on soft bottom, collision
- **Unknown:** The cause of the loss of the vessel is not known

The *Mormackite* is classified as High Risk because the vessel sank when the cargo shifted in rough seas. Data quality is high.

Risk Factor D2: Structural Breakup

This risk factor takes into account how many pieces the vessel broke into during the sinking event or since sinking. This factor addresses how likely it is that multiple components of a ship were broken apart including tanks, valves, and pipes. Experience has shown that even vessels broken in three large sections can still have significant pollutants on board if the sections still have some structural integrity. The risk categories are:

- Low Risk: The vessel is broken into more than three pieces
- **Medium Risk:** The vessel is broken into two-three pieces
- **High Risk:** The vessel is not broken and remains as one contiguous piece
- Unknown: It is currently not known whether or not the vessel broke apart at the time of loss or after sinking

The *Mormackite* is classified as Unknown Risk because it is not known if the vessel broke apart after it sank. Data quality is low.

Factors That May Impact Potential Operations

Orientation (degrees)

This factor addresses what may be known about the current orientation of the intact pieces of the wreck (with emphasis on those pieces where tanks are located) on the seafloor. For example, if the vessel turtled, not only may it have avoided demolition as a hazard to navigation, but it has a higher likelihood of retaining an oil cargo in the non-vented and more structurally robust bottom of the hull.

The location of the *Mormackite* is unknown. Data quality is low.

Depth

Depth information is provided where known. In many instances, depth will be an approximation based on charted depths at the last known locations.

The depth for *Mormackite* is believed to be greater than 11,500 feet due to the last known location. Data quality is low.

Visual or Remote Sensing Confirmation of Site Condition

This factor takes into account what the physical status of wreck site as confirmed by remote sensing or other means such as ROV or diver observations and assesses its capability to retain a liquid cargo. This assesses whether or not the vessel was confirmed as entirely demolished as a hazard to navigation, or severely compromised by other means such as depth charges, aerial bombs, or structural collapse.

The location of the *Mormackite* is unknown. Data quality is low.

Other Hazardous (Non-Oil) Cargo on Board

This factor addresses hazardous cargo other than oil that may be on board the vessel and could potentially be released, causing impacts to ecological and socio-economic resources at risk.

There are no reports of hazardous materials onboard. Data quality is high.

Munitions on Board

This factor addresses hazardous cargo other than oil that may be on board the vessel and could potentially be released or detonated causing impacts to ecological and socio-economic resources at risk.

The Mormackite did not carry any munitions. Data quality is high.

Vessel Pollution Potential Summary

Table 1-1 summarizes the risk factor scores for the pollution potential and mitigating factors that would reduce the pollution potential for the *Mormackite*. Operational factors are listed but do not have a risk score.

Table 1-1: Summary matrix for the vessel risk factors for the *Mormackite* color-coded as red (high risk), yellow (medium risk), and green (low risk).

Data Risk **Vessel Risk Factors** Quality Comments Score Score A1: Oil Volume (total bbl) Medium Maximum of 5,145 bbl, not reported to be leaking Bunker oil is heavy fuel oil, a Group IV oil type A2: Oil Type High Vessel not reported as cleared **B: Wreck Clearance** High **Pollution** No fire was reported **Potential** C1: Burning of the Ship High High **Factors** C2: Oil on Water High No oil was reported on the water D1: Nature of Casualty Cargo shifted in rough seas High Unknown structural breakup D2: Structural Breakup High The best sinking assessment comes from the U.S. Archaeological Not Archaeological Assessment Low Coast Guard; an accurate archaeological Assessment Scored assessment could not be prepared Wreck Orientation Low Unknown, potential to be upright Depth Low >11,500 ft Visual or Remote Sensing Low Location unknown Confirmation of Site Condition Other Hazardous Materials Operational Not High No Onboard Factors Scored **Munitions Onboard** High No Gravesite (Civilian/Military) High Yes Historical Protection Eligibility High NHPA (NHPA/SMCA)

SECTION 2: ENVIRONMENTAL IMPACT MODELING

To help evaluate the potential transport and fates of releases from sunken wrecks, NOAA worked with RPS ASA to run a series of generalized computer model simulations of potential oil releases. The results are used to assess potential impacts to ecological and socio-economic resources, as described in Sections 3 and 4. The modeling results are useful for this screening-level risk assessment; however, it should be noted that detailed site/vessel/and seasonally specific modeling would need to be conducted prior to any intervention on a specific wreck.

Release Scenarios Used in the Modeling

The potential volume of leakage at any point in time will tend to follow a probability distribution. Most discharges are likely to be relatively small, though there could be multiple such discharges. There is a lower probability of larger discharges, though these scenarios would cause the greatest damage. A **Worst Case Discharge** (WCD) would involve the release of all of the cargo oil and bunkers present on the vessel. In the case of the *Mormackite* this would be about 6,000 bbl (rounded up from 5,145 bbl) based on current estimates of the maximum amount of oil remaining onboard the wreck.

The likeliest scenario of oil release from most sunken wrecks, including the *Mormackite*, is a small, episodic release that may be precipitated by disturbance of the vessel in storms. Each of these episodic releases may cause impacts and require a response. **Episodic** releases are modeled using 1% of the WCD. Another scenario is a very low chronic release, i.e., a relatively regular release of small amounts of oil that causes continuous oiling and impacts over the course of a long period of time. This type of release would likely be precipitated by corrosion of piping that allows oil to flow or bubble out at a slow, steady rate. **Chronic** releases are modeled using 0.1% of the WCD.

The **Most Probable** scenario is premised on the release of all the oil from one tank. In the absence of information on the number and condition of the cargo or fuel tanks for all the wrecks being assessed, this scenario is modeled using 10% of the WCD. The **Large** scenario is loss of 50% of the WCD. The five major types of releases are summarized in Table 2-1. The actual type of release that occurs will depend on the condition of the vessel, time factors, and disturbances to the wreck. Note that episodic and chronic release scenarios represent a small release that is repeated many times, potentially repeating the same magnitude and type of impact(s) with each release. The actual impacts would depend on the environmental factors such as real-time and forecast winds and currents during each release and the types/quantities of ecological and socio-economic resources present.

The model results here are based on running the RPS ASA Spill Impact Model Application Package (SIMAP) two hundred times for each of the five spill volumes shown in Table 2-1. The model randomly selects the date of the release, and corresponding environmental, wind, and ocean current information from a long-term wind and current database.

When a spill occurs, the trajectory, fate, and effects of the oil will depend on environmental variables, such as the wind and current directions over the course of the oil release, as well as seasonal effects. The

magnitude and nature of potential impacts to resources will also generally have a strong seasonal component (e.g., timing of bird migrations, turtle nesting periods, fishing seasons, and tourism seasons).

Table 2-1: Potential oil release scenario types for the *Mormackite*.

Scenario Type	Release per Episode	Time Period	Release Rate	Relative Likelihood	Response Tier
Chronic (0.1% of WCD)	6 bbl	Fairly regular intervals or constant	100 bbl over several days	More likely	Tier 1
Episodic (1% of WCD)	60 bbl	Irregular intervals	orals Over several hours or days Most Probable		Tier 1-2
Most Probable (10% of WCD)	600 bbl	One-time release	Over several hours or days	Most Probable	Tier 2
Large (50% of WCD)	3,000 bbl	One-time release	Over several hours or days	Less likely	Tier 2-3
Worst Case	6,000 bbl	One-time release	Over several hours or days	Least likely	Tier 3

The modeling results represent 200 simulations for each spill volume with variations in spill trajectory based on winds and currents. The spectrum of the simulations gives a perspective on the variations in likely impact scenarios. Some resources will be impacted in nearly all cases; some resources may not be impacted unless the spill trajectory happens to go in that direction based on winds and currents at the time of the release and in its aftermath.

For the large and WCD scenarios, the duration of the release was assumed to be 12 hours, envisioning a storm scenario where the wreck is damaged or broken up, and the model simulations were run for a period of 30 days. The releases were assumed to be from a depth between 2-3 meters above the sea floor, using the information known about the wreck location and depth.

As discussed in the NOAA 2013 Risk Assessment for Potentially Polluting Wrecks in U.S. Waters, NOAA identified 87 high and medium priority wrecks for screening-level risk assessment. Within the available funds, it was not feasible to conduct computer model simulations of all 87 high and medium priority wrecks. Therefore, efforts were made to create "clusters" of vessels in reasonable proximity and with similar oil types. In general, the wreck with the largest potential amount of oil onboard was selected for modeling of oil release volumes, and the results were used as surrogates for the other vessels in the cluster. In particular, the regression curves created for the modeled wreck were used to determine the impacts to water column, water surface, and shoreline resources. The *Mormackite*, with up to 5,145 bbl of heavy fuel onboard, was clustered with the *William Rockefeller*, which was modeled at 150,000 bbl of heavy fuel oil. Figure 2-1 shows the location of both vessels.

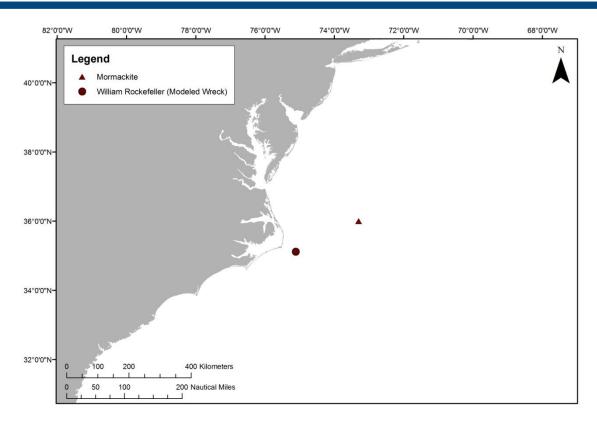


Figure 2-1: Location of the *Mormackite* (red triangle), the wreck discussed in this package, and the *William Rockefeller* (red circle) which was the wreck that was actually modeled in the computer modeling simulations. The results for the *William Rockefeller* are used to estimate the impacts of releases from the *Mormackite*, as discussed in the text.

It is important to acknowledge that these scenarios are only for this screening-level assessment. Detailed site/vessel/and seasonally specific modeling would need to be conducted prior to any intervention on a specific wreck.

Oil Type for Release

The *Mormackite* contained a maximum of 5,145 bbl of heavy fuel oil. Thus, the spill model for the *William Rockefeller*, which was run using heavy fuel oil, was used for this assessment of the *Mormackite*.

Oil Thickness Thresholds

The model results are reported for different oil thickness thresholds, based on the amount of oil on the water surface or shoreline and the resources potentially at risk. Table 2-2 shows the terminology and thicknesses used in this report, for both oil thickness on water and the shoreline. For oil on the water surface, a thickness of 0.01 g/m², which would appear as a barely visible sheen, was used as the threshold for socio-economic impacts because often fishing is prohibited in areas with any visible oil, to prevent contamination of fishing gear and catch. A thickness of 10 g/m² was used as the threshold for ecological impacts, primarily due to impacts to birds, because that amount of oil has been observed to be enough to mortally impact birds and other wildlife. In reality, it is very unlikely that oil would be evenly distributed on the water surface. Spilled oil is always distributed patchily on the water surface in bands or tarballs

with clean water in between. So, Table 2-2a shows the number of tarballs per acre on the water surface for these oil thickness thresholds, assuming that each tarball was a sphere that was 1 inch in diameter. For oil stranded onshore, a thickness of 1 g/m² was used as the threshold for socio-economic impacts because that amount of oil would conservatively trigger the need for shoreline cleanup on amenity beaches. A thickness of 100 g/m² was used as the threshold for ecological impacts based on a synthesis of the literature showing that shoreline life has been affected by this degree of oiling.² Because oil often strands onshore as tarballs, Table 2-2a shows the number of tarballs per m² on the shoreline for these oil thickness thresholds, assuming that each tarball was a sphere that was 1 inch in diameter.

Table 2-2a: Oil thickness thresholds used in calculating area of water impacted. Refer to Sections 3 and 4 for explanations of the thresholds for ecological and socio-economic resource impacts.

Oil Description	Sheen Appearance	Approximate Sheen Thickness		No. of 1 inch Tarballs	Threshold/Risk Factor
Oil Sheen	Barely Visible	0.00001 mm	0.01 g/m ²	~5-6 tarballs per acre	Socio-economic Impacts to Water Surface/Risk Factor 4B-1 and 2
Heavy Oil Sheen	Dark Colors	0.01 mm	10 g/m²	~5,000-6,000 tarballs per acre	Ecological Impacts to Water Surface/ Risk Factor 3B-1 and 2

Table 2-2b: Oil thickness thresholds used in calculating miles of shoreline impacted. Refer to Sections 3 and 4 for explanations of the thresholds for ecological and socio-economic resource impacts.

Oil Description	Oil Appearance	Approximate Sheen Thickness		No. of 1 inch Tarballs	Threshold/Risk Factor
Oil Sheen/Tarballs	Dull Colors	0.001 mm	1 g/m²	~0.12-0.14 tarballs/m ²	Socio-economic Impacts to Shoreline Users/Risk Factor 4C-1 and 2
Oil Slick/Tarballs	Brown to Black	0.1 mm	100 g/m ²	~12-14 tarballs/m ²	Ecological Impacts to Shoreline Habitats/Risk Factor 3C-1 and 2

Potential Impacts to the Water Column

Impacts to the water column from an oil release from the *Mormackite* will be determined by the volume of leakage. Because oil from sunken vessels will be released at low pressures, the droplet sizes will be large enough for the oil to float to the surface. Therefore, impacts to water column resources will result from the natural dispersion of the floating oil slicks on the surface, which is limited to about the top 33 feet. The metric used for ranking impacts to the water column is the area of water surface in mi² that has been contaminated by 1 part per billion (ppb) oil to a depth of 33 feet. At 1 ppb, there are likely to be impacts to sensitive organisms in the water column and potential tainting of seafood, so this concentration is used as a screening threshold for both the ecological and socio-economic risk factors for water column resource impacts. To assist planners in understanding the scale of potential impacts for different leakage volumes, a regression curve was generated for the water column volume oiled using the five volume

² French, D., M. Reed, K. Jayko, S. Feng, H. Rines, S. Pavignano, T. Isaji, S. Puckett, A. Keller, F. W. French III, D. Gifford, J. McCue, G. Brown, E. MacDonald, J. Quirk, S. Natzke, R. Bishop, M. Welsh, M. Phillips and B.S. Ingram, 1996. The CERCLA type A natural resource damage assessment model for coastal and marine environments (NRDAM/CME), Technical Documentation, Vol. I - V. Final Report, Office of Environmental Policy and Compliance, U.S. Dept. Interior, Washington, DC.

scenarios, which is shown in Figure 2-2, which is the regression curve for the *William Rockefeller*. Using this figure, the water column impacts can be estimated for any spill volume. On Figure 2-2, arrows are used to indicate the where the WCD for the *Mormackite* plots on the curve and how the area of the water column impact is determined.

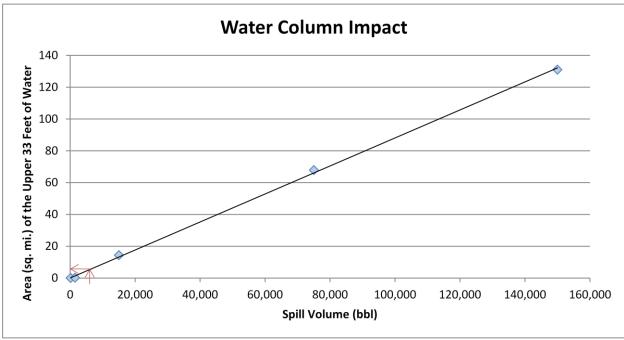


Figure 2-2: Regression curve for estimating the area of water column at or above 1 ppb aromatics impacted as a function of spill volume for the *Mormackite*. This regression curve was generated for the *William Rockefeller*, which has the same oil type and similar volume of potential releases as the *Mormackite*. The arrows indicate where the WCD for the *Mormackite* falls on the curve and how the area of water column impact can be determined for any spill volume.

Potential Water Surface Slick

The slick size from an oil release from the *Mormackite* is a function of the quantity released. The estimated water surface coverage by a fresh slick (the total water surface area "swept" by oil over time) for the various scenarios is shown in Table 2-3, as the mean result of the 200 model runs for the *William Rockefeller* then using the regression curve shown in Figure 2-3 to calculate the values for the different release scenarios for the *Mormackite*. In the model, the representative heavy fuel oil used for this analysis spreads to a minimum thickness of approximately 975 g/m², and the oil is not able to spread any thinner, owing to its high viscosity. As a result, water surface oiling results are identical for the 0.01 and 10 g/m² thresholds. Note that this is an estimate of total water surface affected over a 30-day period. The slick will not be continuous but rather be broken and patchy. Surface expression is likely to be in the form of tarballs and streamers. The location, size, shape, and spread of the oil slick(s) from an oil release from the *Mormackite* will depend on environmental conditions, including winds and currents, at the time of release and in its aftermath. Refer to the risk assessment package for the *William Rockefeller* for maps (Figs. 2-2 and 2-3) showing the areas potentially affected by slicks using the Most Probable volume and the socioeconomic and ecological thresholds.

Table 2-3: Estimated slick area swept on water for oil release scenarios from the *Mormackite*, based on the model results for the *William Rockefeller*.

Scenario Type	Oil Volume (bbl)	Estimated Slick Area Swept Mean of All Models		
	, ,	0.01 g/m ²	10 g/m ²	
Chronic	6	340 mi ²	340 mi ²	
Episodic	60	1,100 mi ²	1,100 mi ²	
Most Probable	600	3,700 mi ²	3,700 mi ²	
Large	3,000	8,400 mi ²	8,400 mi ²	
Worst Case Discharge	6,000	12,000 mi ²	12,000 mi ²	

The actual area affected by a release from the *Mormackite* will be determined by the volume of leakage, whether it is from one or more tanks at a time. To assist planners in understanding the scale of potential impacts for different leakage volumes, a regression curve was generated for the water surface area oiled using the five volume scenarios for the *William Rockefeller*, which is shown in Figure 2-3 and referenced in Table 2-3. Using this figure, the area of water surface with a barely visible sheen can be estimated for any spill volume from the *Mormackite*.

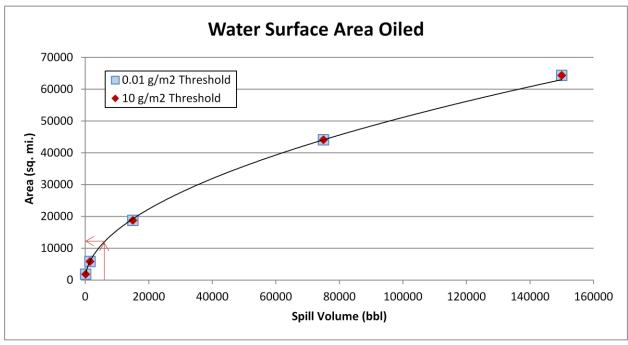


Figure 2-3: Regression curve for estimating the amount of water surface oiling as a function of spill volume for the *Mormackite*, showing both the ecological threshold of 10 g/m² and socio-economic threshold of 0.01 g/m², based on the model results for the *William Rockefeller*. The arrows indicate where the WCD for the *Mormackite* falls on the curve and how the area of water surface impact can be determined for any spill volume. The curves for each threshold are so similar that they plot on top of each other.

Potential Shoreline Impacts

Based on these modeling results, shorelines from as far north as Maryland to as far south as northern Florida are at risk. (Refer to Figure 2-6 in the *William Rockefeller* package to see the probability of oil stranding on the shoreline at concentrations that exceed the threshold of 1 g/m², for the Most Probable release). However, the specific areas that would be oiled will depend on the currents and winds at the time of the oil release(s), as well as on the amount of oil released. Estimated miles of shoreline oiling above the socio-economic threshold of 1 g/m² and the ecological threshold of 100 g/m² by scenario type are shown in Table 2-4.

Table 2-4: Estimated shoreline oiling from leal	kage from the Mormackite	, based on the modeling results fo	r the
William Rockefeller.			

Scenario Type	Volume (bbl)	Estimated Miles of Shoreline Oiling Above 1 g/m ²	Estimated Miles of Shoreline Oiling Above 100 g/m²
Chronic	6	12	0
Episodic	60	16	0
Most Probable	600	19	5
Large	3,000	22	11
Worst Case Discharge	6,000	23	14

The actual shore length affected by a release will be determined by the volume of leakage and environmental conditions during an actual release. To assist planners in scaling the potential impact for different leakage volumes, a regression curve was generated for the total shoreline length oiled using the five volume scenarios for the *William Rockefeller*, as detailed in Table 2.4 and shown in Figure 2-4. Using this figure, the shore length oiled can be estimated for any spill volume from the *Mormackite*.

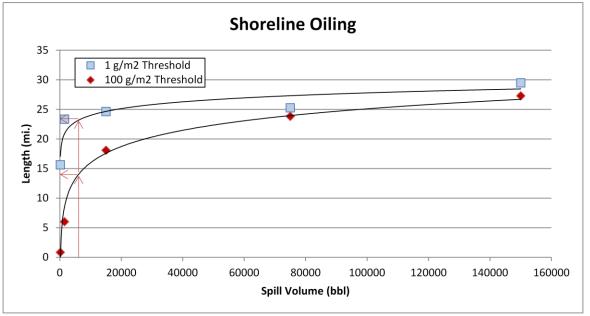


Figure 2-4: Regression curve for estimating the amount of shoreline oiling at different thresholds as a function of spill volume for the *Mormackite*, based on the model results for the *William Rockefeller*. The arrows indicate where the WCD for the *Mormackite* falls on the curve and how the length of shoreline impact can be determined for any spill volume.

SECTION 3: ECOLOGICAL RESOURCES AT RISK

Ecological resources at risk from a catastrophic release of oil from the *Mormackite* include numerous guilds of birds (Table 3-1), particularly those sensitive to surface oiling while rafting or plunge diving to feed, that are present in nearshore/offshore waters. In addition, this region is important for nesting loggerhead sea turtles, migrating marine mammals, and commercially important fish and invertebrates, including some sensitive hard-bottom habitats used by these species.

Table 3-1: Ecological resources at risk from a release of oil from the *Mormackite*.

(FT = Federal threatened: FE = Federal endangered: ST = State threatened: SE = State endangered).

Species Group	Species Subgroup and Geography	Seasonal Presence
Seabirds	 Outer Continental Shelf (OCS) offshore of Cape Hatteras, NC: greatest diversity of seabirds in SE U.S.; greatest density of tropical seabirds in SE U.S. Species include: shearwaters, storm petrels, Bermuda petrels Significant percentage of the global population of black-capped petrels (FE) may be present in Sargassum mats off Cape Hatteras Audubon's shearwaters (50-75% of population) concentrate along the Continental Shelf edge off NC, extending northward to VA border (~3,800 pairs) Seabird species groups using Mid-Atlantic U.S. waters include boobies (~300K) and alcids (tens of thousands) 	OCS: Ranges by species but Mar-Nov peak Petrels off NC/VA coast during summer through early fall; Shearwaters off of NC/VA in late summer
Pelagic Birds, Waterfowl, and Diving Birds	Coastal pelagic birds, waterfowl, diving birds Outer Banks, Inshore waters NC to VA: key foraging area for gulls and terns; key migration corridor for loons and sea ducks; NC's largest population of northern gannet and red-breasted merganser Mid-Atlantic inshore/offshore waters: 150K loons, 6K pelicans, 100s of thousands of cormorants and terns, millions of gulls Mouth of Chesapeake: high concentrations of gannets and very high concentrations of RBME	Terns, gulls present in spring/summer; Loons, sea ducks present in spring/fall; Gannets and red- breasted mergansers present in winter
Sea Ducks	 Sea ducks (includes mean and max distance of flocks to shore, 2009-2010 data) Surf scoter (2/nm8 nm): Chesapeake. Bay = 19-58K; NC: 0-41K Black scoter (2 nm/13 nm): Chesapeake. Bay = 3-27K; NC = 3.5-13K Bufflehead, mergansers, goldeneyes (<1 nm/7-14 nm) Off NC: 12K Off MD/DE: 3K Mouth of Chesapeake Bay have high concentrations of species that are abundant over shoals (loons, pelicans, cormorants, sea ducks, gulls, terns, alcids); scoters are 10X more abundant than other species on shoals and large numbers concentrate off VA/Chesapeake Bay 	Sea ducks surveyed in winter (peak abundances); Migration from Fall to Spring (Oct-Apr) Winter use of shoals (Dec-Mar); summer use of shoals likely farther north
Shorebirds and Colonial Nesting Birds	 Outer Banks: globally important for coastal birds with 365+ species Key species: Piping plover, willet, American oystercatcher, black skimmers VA Barrier Island/Lagoon System: most important bird area in VA and one of most along North Atlantic: piping plover (FT), Wilson's plover, American oystercatcher, gull-billed tern, least tern, black skimmer (many of these species are state listed or special concern in VA); most significant breeding population in state of waders; marsh nesters have center of abundance here; internationally significant stopover point for whimbrel, short-billed dowitcher, and red knot 	Colonial and beach nesters peak Apr-Aug Winter migration stop for plovers
Sea Turtles	Nesting (annual counts along shorelines with most probable impacts). Mostly occurs in NC but loggerheads can nest as far north as DE • 650+ Loggerhead (FT) • <20 Green (FT) • <10 Leatherback (FE)	Nesting season: Adults: May-Sept Hatching: May-Dec In water:

Species Group	Species Subgroup and Geography	Seasonal Presence
	Distribution: Offshore hot spots not well known	Year round with Apr- Dec peak
	Young associate with Sargassum mats off of Cape Hatteras	
Marine Mammals	Baleen whales: Primarily North Atlantic right whale (FE) and fin whale (FE) with occasional humpback whale (FE), sei whale (FE) and minke whale Right whales are critically endangered (<400 individuals left); Coastal waters are used as a migratory pathway and border the northern extent of calving grounds Inshore cetaceans: Bottlenose dolphin and harbor porpoise use coastal waters out to the shelf break Offshore cetaceans: Often associated with shelf edge features, convergence zones	Baleen whales present Fall-Spring. Adults migrate from feeding grounds in North Atlantic to calving grounds further south Bottlenose dolphins present year round
Fish and Inverts	(fronts), and Sargassum mats (summer) Coastal ocean waters support many valuable fisheries and/or species of concern in the region: Benthic or bottom associated: Sea scallop, scup, black sea bass, butterfish,	Benthic and midwater species are present throughout the year
	 goosefish, scamp, horseshoe crab, tilefish, other reef species <i>Midwater</i>: Atlantic mackerel, spanish mackerel, shortfin squid, bluefish, menhaden, spiny dogfish, smooth dogfish, <i>Pelagic</i>: Bluefin tuna, yellowfin tuna, wahoo, dolphinfish, bigeye tuna, swordfish <i>Diadromous</i>: Alewife, blueback herring, American shad, hickory shad, Atlantic tomcod, American eel, Atlantic sturgeon (Fed. species of concern), shortnose sturgeon (FE), striped bass <i>Estuarine dependent</i>: Southern flounder, spotted seatrout, blue crab, atlantic croaker, spot, weakfish, shrimp 	Bluefin tuna present fall-spring; other pelagic fish present year round Anadromous fish migrate inshore to spawn in fresh water in spring
	 Estuarine resident: Eastern oyster, northern quahog Important concentration/conservation areas are: Pelagic species can be more concentrated around the shelf break and at 	American eel migrates offshore to spawn in winter
	 oceanographic fronts in the region The Point (offshore of Cape Hatteras) – Essential Fish Habitat/Habitats Areas of Particular Concern (EFH/HAPC) for coastal migratory pelagics and dolphin/wahoo Primary nursery areas in NC bays – for estuarine dependent species Sargassum mats off Cape Hatteras provide foraging and shelter for juvenile fish and invertebrates 	Estuarine dependent fish migrate offshore in fall/winter to spawn; juveniles and adults use estuaries during spring/summer
Benthic Habitats	Submerged aquatic vegetation is critical to numerous species and occurs inside of bays and sounds throughout the region Scattered hard-bottom sites are located off NC and are considered HAPC for reef-associated fishes (including the areas listed above)	Year round

The Environmental Sensitivity Index (ESI) atlases for the potentially impacted coastal areas from a leak from the *Mormackite* are generally available at each U.S. Coast Guard Sector. They can also be downloaded at: http://response.restoration.noaa.gov/esi. These maps show detailed spatial information on the distribution of sensitive shoreline habitats, biological resources, and human-use resources. The tables on the back of the maps provide more detailed life-history information for each species and location. The ESI atlases should be consulted to assess the potential environmental resources at risk for specific spill scenarios. In addition, the Geographic Response Plans within the Area Contingency Plans prepared by the

Area Committee for each U.S. Coast Guard Sector have detailed information on the nearshore and shoreline ecological resources at risk and should be consulted.

Ecological Risk Factors

Risk Factor 3: Impacts to Ecological Resources at Risk (EcoRAR)

Ecological resources include plants and animals (e.g., fish, birds, invertebrates, and mammals), as well as the habitats in which they live. All impact factors are evaluated for both the Worst Case and the Most Probable Discharge oil release from the wreck. Risk factors for ecological resources at risk (EcoRAR) are divided into three categories:

- Impacts to the water column and resources in the water column;
- Impacts to the water surface and resources on the water surface; and
- Impacts to the shoreline and resources on the shoreline.

The impacts from an oil release from the wreck would depend greatly on the direction in which the oil slick moves, which would, in turn, depend on wind direction and currents at the time of and after the oil release. Impacts are characterized in the risk analysis based on the likelihood of any measurable impact, as well as the degree of impact that would be expected if there is an impact. The measure of the degree of impact is based on the median case for which there is at least some impact. The median case is the "middle case" – half of the cases with significant impacts have less impact than this case, and half have more.

For each of the three ecological resources at risk categories, risk is defined as:

- The **probability of oiling** over a certain threshold (i.e., the likelihood that there will be an impact to ecological resources over a certain minimal amount); and
- The **degree of oiling** (the magnitude or amount of that impact).

As a reminder, the ecological impact thresholds are: 1 ppb aromatics for water column impacts; 10 g/m^2 for water surface impacts; and 100 g/m^2 for shoreline impacts.

In the following sections, the definition of low, medium, and high for each ecological risk factor is provided. Also, the classification for the *Mormackite* is provided, both as text and as shading of the applicable degree of risk bullet, for the WCD release of 6,000 bbl and a border around the Most Probable Discharge of 600 bbl. Please note: The probability of oiling cannot be determined using the regression curves; probability can only be determined from the 200 model runs. Thus, the modeling results and regression curves for the *William Rockefeller* are used to estimate the values used in the risk scoring for the degree of oiling only.

Risk Factor 3A: Water Column Impacts to EcoRAR

Water column impacts occur beneath the water surface. The ecological resources at risk for water column impacts are fish, marine mammals, and invertebrates (e.g., shellfish, and small organisms that are food for larger organisms in the food chain). These organisms can be affected by toxic components in the oil. The

threshold for water column impact to ecological resources at risk is a dissolved aromatic hydrocarbons concentration of 1 ppb (i.e., 1 part total dissolved aromatics per one billion parts water). Dissolved aromatic hydrocarbons are the most toxic part of the oil. At this concentration and above, one would expect impacts to organisms in the water column.

Risk Factor 3A-1: Water Column Probability of Oiling of EcoRAR (not scored)

This risk factor reflects the probability that at least 0.2 mi² of the upper 33 feet of the water column would be contaminated with a high enough concentration of oil to cause ecological impacts. The three risk scores for water column oiling probability are:

• **Low Oiling Probability:** Probability = <10%

• **Medium Oiling Probability:** Probability = 10 - 50%

• **High Oiling Probability:** Probability > 50%

Risk Factor 3A-2: Water Column Degree of Oiling of EcoRAR

The degree of oiling of the water column reflects the total volume of water that would be contaminated by oil at a concentration high enough to cause impacts. The three categories of impact are:

- **Low Impact:** impact on less than 0.2 mi² of the upper 33 feet of the water column at the threshold level
- **Medium Impact**: impact on 0.2 to 200 mi² of the upper 33 feet of the water column at the threshold level
- **High Impact:** impact on more than 200 mi² of the upper 33 feet of the water column at the threshold level

The *Mormackite* is classified as Medium Risk for degree of oiling for water column ecological resources for the WCD of 6,000 bbl because the mean volume of water contaminated in the model runs was 5 mi² of the upper 33 feet of the water column. For the Most Probable Discharge of 600 bbl, the *Mormackite* is classified as Medium Risk for degree of oiling because the mean volume of water contaminated was 1 mi² of the upper 33 feet of the water column.

Risk Factor 3B: Water Surface Impacts to EcoRAR

Ecological resources at risk at the water surface include surface feeding and diving sea birds, sea turtles, and marine mammals. These organisms can be affected by the toxicity of the oil as well as from coating with oil. The threshold for water surface oiling impact to ecological resources at risk is 10 g/m^2 (10 grams of floating oil per square meter of water surface). At this concentration and above, one would expect impacts to birds and other animals that spend time on the water surface.

Risk Factor 3B-1: Water Surface Probability of Oiling of EcoRAR (not scored)

This risk factor reflects the probability that at least 1,000 mi² of the water surface would be affected by enough oil to cause impacts to ecological resources. The three risk scores for oiling are:

• **Low Oiling Probability:** Probability = <10%

• **Medium Oiling Probability:** Probability = 10 - 50%

• **High Oiling Probability:** Probability > 50%

Risk Factor 3B-2: Water Surface Degree of Oiling of EcoRAR

The degree of oiling of the water surface reflects the total amount of oil that would affect the water surface in the event of a discharge from the vessel. The three categories of impact are:

- Low Impact: less than 1,000 mi² of water surface impact at the threshold level
- **Medium Impact:** 1,000 to 10,000 mi² of water surface impact at the threshold level
- **High Impact:** more than 10,000 mi² of water surface impact at the threshold level

The *Mormackite* is classified as High Risk for degree of oiling for water surface ecological resources for the WCD because the mean area of water contaminated in the model runs was 12,000 mi². It is classified as Medium Risk for degree of oiling for the Most Probable Discharge because the mean area of water contaminated was 3,700 mi².

Risk Factor 3C: Shoreline Impacts to EcoRAR

The impacts to different types of shorelines vary based on their type and the organisms that live on them. For the modeled wrecks, shorelines were weighted by their degree of sensitivity to oiling. Wetlands are the most sensitive (weighted as "3" in the impact modeling), rocky and gravel shores are moderately sensitive (weighted as "2"), and sand beaches (weighted as "1") are the least sensitive to ecological impacts of oil. In this risk analysis for the *Mormackite*, shorelines have NOT been weighted by their degree of sensitivity to oiling because these data are available only for modeled vessels. Therefore, the impacts are evaluated only on the total number of shoreline miles oiled as determined from the regression curve.

Risk Factor 3C-1: Shoreline Probability of Oiling of EcoRAR (not scored)

This risk factor reflects the probability that the shoreline would be coated by enough oil to cause impacts to shoreline organisms. The threshold for shoreline oiling impacts to ecological resources at risk is 100 g/m^2 (i.e., 100 grams of oil per square meter of shoreline). The three risk scores for oiling are:

- **Low Oiling Probability:** Probability = <10%
- **Medium Oiling Probability:** Probability = 10 50%
- **High Oiling Probability:** Probability > 50%

Risk Factor 3C-2: Shoreline Degree of Oiling of EcoRAR

The degree of oiling of the shoreline reflects the length of shorelines oiled by at least 100 g/m² in the event of a discharge from the vessel. The three categories of impact are:

- Low Impact: less than 10 miles of shoreline impacted at the threshold level
- **Medium Impact:** 10 100 miles of shoreline impacted at the threshold level
- **High Impact:** more than 100 miles of shoreline impacted at the threshold level

The *Mormackite* is classified as Medium Risk for degree of oiling for shoreline ecological resources for the WCD because the mean length of shoreline contaminated in the model runs was 14 miles. It is classified as Low Risk for degree of oiling for the Most Probable Discharge because the mean length of shoreline contaminated in the model runs was 5 miles.

Considering the modeled risk scores and the ecological resources at risk, the ecological risk from potential releases of the WCD of 6,000 bbl of heavy fuel oil from the *Mormackite* is summarized as listed below and indicated in the far-right column in Table 3-2:

- Water column resources Low, because water column impacts occurred mostly far offshore where sensitive water column resources are less concentrated
- Water surface resources High, because of the seasonally large number of marine birds in offshore waters, sea turtle use in *Sargassum* habitat, and the persistence of tarballs that can be transported long distances. It should be noted that oil on the surface will not be continuous but rather be broken and patchy and in the form of tarballs and streamers
- Shoreline resources Low, because most of the shoreline at risk is composed of sand beaches which are relatively easy to clean, and the oil would be highly weathered by the time of stranding

Table 3-2: Ecological risk factor scores for the **Worst Case Discharge of 6,000 bbl** of heavy fuel oil from the *Mormackite*.

Risk Factor	Risk Score		е	Explanation of Risk Score	Final Score
3A-1: Water Column Probability EcoRAR Oiling	Low	Medium	High	N/A: Only available for modeled vessels	Law
3A-2: Water Column Degree EcoRAR Oiling	Low	Medium	High	The mean volume of water contaminated above 1 ppb was 5 mi ² of the upper 33 feet of the water column	Low
3B-1: Water Surface Probability EcoRAR Oiling	Low	Medium	High	N/A: Only available for modeled vessels	
3B-2: Water Surface Degree EcoRAR Oiling	Low	Medium	High	The mean area of water contaminated above 10 g/m² was 12,000 mi²	High
3C-1: Shoreline Probability EcoRAR Oiling	Low	/ Medium High		N/A: Only available for modeled vessels	Low
3C-2: Shoreline Degree EcoRAR Oiling	Low	Medium	High	The length of shoreline contaminated by at least 100 g/m² was 14 mi	LOW

For the Most Probable Discharge of 600 bbl of heavy fuel oil, the ecological risk from potential releases from the *Mormackite* is summarized as listed below and indicated in the far-right column in Table 3-3:

- Water column resources Low, because water column impacts were very small
- Water surface resources Medium, because of the seasonally large number of marine birds in offshore waters, sea turtle use in *Sargassum* habitat, and the persistence of tarballs that can be transported long distances. It should be noted that oil on the surface will not be continuous but rather be broken and patchy and in the form of tarballs and streamers
- Shoreline resources Low, because most of the shoreline at risk is composed of sand beaches which are relatively easy to clean, and the oil would be highly weathered by the time of stranding

Table 3-3: Ecological risk factor scores for the **Most Probable Discharge of 600 bbl** of heavy fuel oil from the *Mormackite*.

Risk Factor	Risk Score		e	Explanation of Risk Score	Final Score
3A-1: Water Column Probability EcoRAR Oiling	Low	Medium	High	N/A: Only available for modeled vessels	Low
3A-2: Water Column Degree EcoRAR Oiling	Low	Medium	High	The mean volume of water contaminated above 1 ppb was 1 mi ² of the upper 33 feet of the water column	LOW
3B-1: Water Surface Probability EcoRAR Oiling	Low	Medium High		N/A: Only available for modeled vessels	10 a d
3B-2: Water Surface Degree EcoRAR Oiling	Low	Medium	High	The mean area of water contaminated above 10 g/m² was 3,700 mi²	Med
3C-1: Shoreline Probability EcoRAR Oiling	Low	Medium High		N/A: Only available for modeled vessels	Low
3C-2: Shoreline Degree EcoRAR Oiling	Low	Medium	High	The length of shoreline contaminated by at least 100 g/m² was 5 mi	LOW

SECTION 4: SOCIO-ECONOMIC RESOURCES AT RISK

In addition to natural resource impacts, spills from sunken wrecks have the potential to cause significant social and economic impacts. Socio-economic resources potentially at risk from oiling are listed in Table 4-1 and shown in Figures 4-1 and 4-2. The potential economic impacts include disruption of coastal economic activities such as commercial and recreational fishing, boating, vacationing, commercial shipping, and other activities that may become claims following a spill.

Socio-economic resources in the areas potentially affected by a release from the *Mormackite* include recreational beaches on the Outer Banks of North Carolina and the Cape Hatteras National Seashore that are very highly utilized during summer, and are still in use during spring and fall for shore fishing. This area also has hotspots for chartered fishing vessels and recreational fishing parties. Many areas along the entire potential spill zone are widely popular seaside resorts and support recreational activities such as boating, diving, sightseeing, sailing, fishing, and wildlife viewing.

A release could impact shipping lanes, which accommodate two significant ports in North Carolina – Morehead City and Wilmington with a total of 635 port calls and 22.3 million tonnage annually, of which over 40% are tankers. Commercial fishing is economically important to the region. A release could impact fishing fleets that utilize the waters around and outside the Outer Banks, yielding annual catches of about \$64.7 million.

In addition to the ESI atlases, the Geographic Response Plans within the Area Contingency Plans prepared by the Area Committee for each U.S. Coast Guard Sector have detailed information on important socio-economic resources at risk.

Spill response costs for a release of oil from the *Mormackite* would be dependent on volume of oil released and specific areas impacted. The specific shoreline impacts and spread of the oil would determine the response required and the costs for that response.

Table 4-1: Socio-economic resources at risk from a release of oil from the *Mormackite*.

Resource Type	Resource Name	Economic Activities
National Seashore	Cape Hatteras National Seashore, NC	National seashores provide recreation for local and tourist populations while preserving and protecting the nation's natural shoreline treasures. National seashores are coastal areas federally designated as being of natural and recreational significance as a preserved area. Cape Hatteras is known for its Bodie Island and Cape Hatteras Lighthouses. Popular recreation activities include windsurfing, birdwatching, fishing, shell collecting, and kayaking. The barrier island provides refuge for the endangered piping plover, seabeach amaranth, and sea turtles.
National Wildlife Refuges	Back Bay NWR (VA) Mackay Island NWR (NC) Currituck NWR (NC) Pea Island NWR (NC) Cedar Island NWR (NC)	National wildlife refuges in three states may be impacted. These federally managed and protected lands provide refuges and conservation areas for sensitive species and habitats.

Resource Type	Resource Name	Economic Activities						
	Waccamaw NWR (SC)							
Commercial Fishing	A number of fishing fleets use the New York Bight area and surrounding waters for commercial							
	fishing purposes.							
	Beaufort-Morehead City Total Landings (2010): \$9.2M							
	Belhaven-Washington	Total Landings (2010): \$3.7M						
	Elizabeth City Total Landings (2010): \$5.4M							
	Engelhard-Swanquarter	Total Landings (2010): \$10.6M						
	Oriental-Vandemere Total Landings (2010): \$8.4M							
	Sneads Ferry-Swansboro	Total Landings (2010): \$5.4M						
	Wanchese-Stumpy Point	Total Landings (2010): \$22.0M						
Ports	There are two significant commercial ports in North Carolina that could potentially be impacted by							
	spillage and spill response activities. The port call numbers below are for large vessels only. There							
	are many more, smaller vessels (under 400 GRT) that also use these ports.							
	Morehead City, NC 85 port calls annually							
	Wilmington, NC	550 port calls annually						

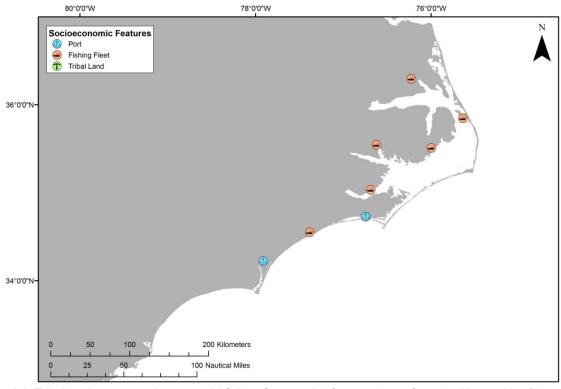


Figure 4-1: Tribal lands, ports, and commercial fishing fleets at risk from a release from the *Mormackite*. (Note that there are no tribal lands affected.)

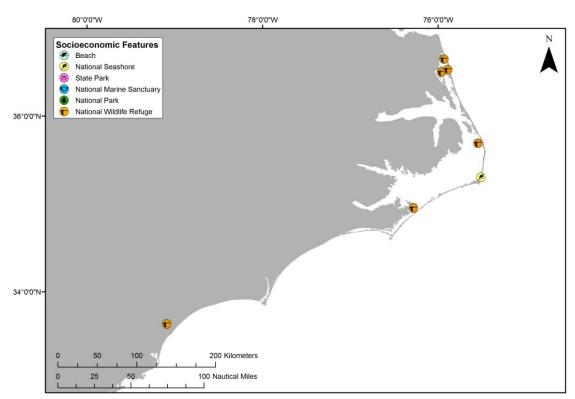


Figure 4-2: Beaches, coastal state parks, and Federal protected areas at risk from a release from the *Mormackite*.

Socio-Economic Risk Factors

Risk Factor 4: Impacts to Socio-economic Resources at Risk (SRAR)

Socio-economic resources at risk (SRAR) include potentially impacted resources that have some economic value, including commercial and recreational fishing, tourist beaches, private property, etc. All impact factors are evaluated for both the Worst Case and the Most Probable Discharge oil release from the wreck. Risk factors for socio-economic resources at risk are divided into three categories:

- Water Column: Impacts to the water column and to economic resources in the water column (i.e., fish and invertebrates that have economic value);
- Water Surface: Impacts to the water surface and resources on the water surface (i.e., boating and commercial fishing); and
- **Shoreline:** Impacts to the shoreline and resources on the shoreline (i.e., beaches, real property).

The impacts from an oil release from the wreck would depend greatly on the direction in which the oil slick moves, which would, in turn, depend on wind direction and currents at the time of and after the oil release. Impacts are characterized in the risk analysis based on the likelihood of any measurable impact, as well as the degree of impact that would be expected if there were one. The measure of the degree of impact is based on the median case for which there is at least some impact. The median case is the "middle case" – half of the cases with significant impacts have less impact than this case, and half have more.

For each of the three socio-economic resources at risk categories, risk is classified with regard to:

- The **probability of oiling** over a certain threshold (i.e., the likelihood that there will be exposure to socio-economic resources over a certain minimal amount known to cause impacts); and
- The **degree of oiling** (the magnitude or amount of that exposure over the threshold known to cause impacts).

As a reminder, the socio-economic impact thresholds are: 1 ppb aromatics for water column impacts; 0.01 g/m^2 for water surface impacts; and 1 g/m^2 for shoreline impacts.

In the following sections, the definition of low, medium, and high for each socio-economic risk factor is provided. Also, in the text classification for the *Mormackite*, shading indicates the degree of risk for a WCD release of 6,000 bbl and a border indicates degree of risk for the Most Probable Discharge of 600 bbl. Please note: The probability of oiling cannot be determined using the regression curves; probability can only be determined from the 200 model runs. Thus, the modeling results and regression curves for the *William Rockefeller* are used to estimate the values used in the risk scoring for the **degree of oiling only**.

Risk Factor 4A-1: Water Column: Probability of Oiling of SRAR (not scored)

This risk factor reflects the probability that at least 0.2 mi² of the upper 33 feet of the water column would be contaminated with a high enough concentration of oil to cause socio-economic impacts. The threshold for water column impact to socio-economic resources at risk is an oil concentration of 1 ppb (i.e., 1 part oil per one billion parts water). At this concentration and above, one would expect impacts and potential tainting to socio-economic resources (e.g., fish and shellfish) in the water column; this concentration is used as a screening threshold for both the ecological and socio-economic risk factors.

The three risk scores for oiling are:

• **Low Oiling Probability:** Probability = <10%

• **Medium Oiling Probability:** Probability = 10 - 50%

• **High Oiling Probability:** Probability > 50%

Risk Factor 4A-2: Water Column Degree of Oiling of SRAR

The degree of oiling of the water column reflects the total amount of oil that would affect the water column in the event of a discharge from the vessel. The three categories of impact are:

- **Low Impact:** impact on less than 0.2 mi² of the upper 33 feet of the water column at the threshold level
- **Medium Impact:** impact on 0.2 to 200 mi² of the upper 33 feet of the water column at the threshold level
- **High Impact:** impact on more than 200 mi² of the upper 33 feet of the water column at the threshold level

The *Mormackite* is classified as Medium Risk for degree of oiling for water column socio-economic resources for the WCD of 6,000 bbl because the mean volume of water contaminated in the model runs was 5 mi² of the upper 33 feet of the water column. For the Most Probable Discharge of 600 bbl, the

Mormackite is classified as Medium Risk for degree of oiling because the mean volume of water contaminated was 1 mi² of the upper 33 feet of the water column.

Risk Factor 4B-1: Water Surface Probability of Oiling of SRAR (not scored)

This risk factor reflects the probability that at least 1,000 mi² of the water surface would be affected by enough oil to cause impacts to socio-economic resources. The three risk scores for oiling are:

• **Low Oiling Probability:** Probability = <10%

• **Medium Oiling Probability:** Probability = 10 - 50%

• **High Oiling Probability:** Probability > 50%

The threshold level for water surface impacts to socio-economic resources at risk is 0.01 g/m² (i.e., 0.01 grams of floating oil per square meter of water surface). At this concentration and above, one would expect impacts to socio-economic resources on the water surface.

Risk Factor 4B-2: Water Surface Degree of Oiling of SRAR

The degree of oiling of the water surface reflects the total amount of oil that would affect the water surface in the event of a discharge from the vessel. The three categories of impact are:

- Low Impact: less than 1,000 mi² of water surface impact at the threshold level
- **Medium Impact:** 1,000 to 10,000 mi² of water surface impact at the threshold level
- **High Impact:** more than 10,000 mi² of water surface impact at the threshold level

The *Mormackite* is classified as High Risk for degree of oiling for water surface socio-economic resources for the WCD of 6,000 bbl because the mean area of water contaminated in the model runs was 12,000 mi². The *Mormackite* is classified as Medium Risk for degree of oiling because the mean area of water contaminated was 3,700 mi².

Risk Factor 4C: Shoreline Impacts to SRAR

The impacts to different types of shorelines vary based on economic value. For the modeled wrecks, shorelines have been weighted by their degree of sensitivity to oiling. Sand beaches are the most economically valued shorelines (weighted as "3" in the impact analysis), rocky and gravel shores are moderately valued (weighted as "2"), and wetlands are the least economically valued shorelines (weighted as "1"). In this risk analysis for the *Mormackite*, shorelines have NOT been weighted by their degree of sensitivity to oiling because these data are available only for modeled vessels. Therefore, the impacts are evaluated only on the total number of shoreline miles oiled as determined from the regression curve.

Risk Factor 4C-1: Shoreline Probability of Oiling of SRAR (not scored)

This risk factor reflects the probability that the shoreline would be coated by enough oil to cause impacts to shoreline users. The threshold for impacts to shoreline SRAR is 1 g/m^2 (i.e., 1 gram of oil per square meter of shoreline). The three risk scores for oiling are:

- **Low Oiling Probability:** Probability = <10%
- **Medium Oiling Probability:** Probability = 10 50%
- **High Oiling Probability:** Probability > 50%

Risk Factor 4C-2: Shoreline Degree of Oiling of SRAR

The degree of oiling of the shoreline reflects the total amount of oil that would affect the shoreline in the event of a discharge from the vessel. The three categories of impact are:

- Low Impact: less than 10 miles of shoreline impacted at threshold level
- **Medium Impact:** 10 100 miles of shoreline impacted at threshold level
- **High Impact:** more than 100 miles of shoreline impacted at threshold level

The *Mormackite* is classified as Medium Risk for degree of oiling because the mean length of shoreline contaminated in the model runs was 23 miles. The *Mormackite* is classified as Medium Risk for degree of oiling for shoreline socio-economic resources for the Most Probable Discharge because the mean length of shoreline contaminated was 19 miles.

Considering the modeled risk scores and the socio-economic resources at risk, the socio-economic risk from potential releases of the WCD of 6,000 bbl of heavy fuel oil from the *Mormackite* is summarized as listed below and indicated in the far-right column in Table 4-2:

- Water column resources Low, because a small water column area would be impacted in important fishing grounds
- Water surface resources Medium, because a large offshore area would be affected in an area of important shipping lanes. It should be noted that oil on the surface will not be continuous but rather be broken and patchy and in the form of sheens, tarballs, and streamers
- Shoreline resources Medium, because a moderate amount of shoreline would be impacted with the persistent oil and tarballs and would be relatively easy to clean, although there are a large number of potentially vulnerable socio-economic resources located along the shoreline

Table 4-2: Socio-economic risk factor ranks for the **Worst Case Discharge of 6,000 bbl** of heavy fuel oil from the *Mormackite*.

Risk Factor	Risk Score		e	Explanation of Risk Score		
4A-1: Water Column Probability SRAR Oiling	Low	Medium	High	N/A: Only available for modeled vessels	Law	
4A-2: Water Column Degree SRAR Oiling	Low	Medium	High	The mean volume of water contaminated above 1 ppb was 5 mi ² of the upper 33 feet of the water column	Low	
4B-1: Water Surface Probability SRAR Oiling	Low	Medium	High	N/A: Only available for modeled vessels		
4B-2: Water Surface Degree SRAR Oiling	Low	Medium	High	The mean area of water contaminated above 0.01 g/m² was 12,000 mi²	Med	
4C-1: Shoreline Probability SRAR Oiling	Low	Medium	High	N/A: Only available for modeled vessels		
4C-2: Shoreline Degree SRAR Oiling	Low	Medium	High	The length of shoreline contaminated by at least 1 g/m² was 23 mi	Med	

For the Most Probable Discharge of 600 bbl, the socio-economic risk from potential releases of heavy fuel oil from the *Mormackite* is summarized as listed below and indicated in the far-right column in Table 4-3:

- Water column resources Low, because a small water column area would be impacted in important fishing grounds
- Water surface resources Medium, because a large offshore area would be affected in an area of important shipping lanes. It should be noted that oil on the surface will not be continuous but rather be broken and patchy and in the form of sheens, tarballs, and streamers
- Shoreline resources Medium, because a moderate amount of shoreline would be impacted with the persistent oil and tarballs and would be relatively easy to clean, although there are a large number of potentially vulnerable socio-economic resources located along the shoreline

Table 4-3: Socio-economic risk factor ranks for the **Most Probable Discharge of 600 bbl** of heavy fuel oil from the *Mormackite*.

Risk Factor	Risk Score		e	Explanation of Risk Score		
4A-1: Water Column Probability SRAR Oiling	Low	Medium	High	N/A: Only available for modeled vessels	Low	
4A-2: Water Column Degree SRAR Oiling	Low	Medium	High	The mean volume of water contaminated above 1 ppb was 1 mi ² of the upper 33 feet of the water column	Low	
4B-1: Water Surface Probability SRAR Oiling	Low	Medium	High	N/A: Only available for modeled vessels	Med	
4B-2: Water Surface Degree SRAR Oiling	Low	Medium	High	The mean area of water contaminated above 0.01 g/m² was 3,700 mi²		
4C-1: Shoreline Probability SRAR Oiling	Low	Medium	High	N/A: Only available for modeled vessels		
4C-2: Shoreline Degree SRAR Oiling	Low	Medium	High	The length of shoreline contaminated by at least 1 g/m² was 19 mi	Med	

SECTION 5: OVERALL RISK ASSESSMENT AND RECOMMENDATIONS FOR ASSESSMENT, MONITORING, OR REMEDIATION

The overall risk assessment for the *Mormackite* is comprised of a compilation of several components that reflect the best available knowledge about this particular site. Those components are reflected in the previous sections of this document and are:

- Vessel casualty information and how site formation processes have worked on this vessel
- Ecological resources at risk
- Socio-economic resources at risk
- Other complicating factors (war graves, other hazardous cargo, etc.)

Table 5-1 summarizes the screening-level risk assessment scores for the different risk factors, as discussed in the previous sections. As noted in Sections 3 and 4, each of the ecological and socioeconomic risk factors each has two components, probability and degree. Of those two, degree is given more weight in deciding the combined score for an individual factor, e.g., a high probability and medium degree score would result in a medium overall for that factor. Please note: The probability of oiling cannot be determined using the regression curves; probability can only be determined from the 200 model runs. Thus, the modeling results and regression curves for the *William Rockefeller* were used to estimate the values used in the risk scoring for the **degree of oiling only**.

In order to make the scoring more uniform and replicable between wrecks, a value was assigned to each of the 7 criteria. This assessment has a total of 7 criteria (based on table 5-1) with 3 possible scores for each criteria (L, M, H). Each was assigned a point value of L=1, M=2, H=3. The total possible score is 21 points, and the minimum score is 7. The resulting category summaries are:

Low Priority 7-11 Medium Priority 12-14 High Priority 15-21

For the Worst Case Discharge, *Mormackite* scores Medium with 13 points; for the Most Probable Discharge, *Mormackite* also scores Medium with 12 points. Under the National Contingency Plan, the U.S. Coast Guard and the Regional Response Team have the primary authority and responsibility to plan, prepare for, and respond to oil spills in U.S. waters. Based on the technical review of available information, NOAA proposes the following recommendations for the *Mormackite*. The final determination of what type of action, if any, rests with the U.S. Coast Guard.

Mormackite	Possible NOAA Recommendations
	Wreck should be considered for further assessment to determine the vessel condition, amount of oil onboard, and feasibility of oil removal action
1	Location is unknown; Use surveys of opportunity to attempt to locate this vessel and gather more information on the vessel condition
	Conduct active monitoring to look for releases or changes in rates of releases
1	Be noted in the Area Contingency Plans so that if a mystery spill is reported in the general area, this vessel could be investigated as a source
✓	Conduct outreach efforts with the technical and recreational dive community as well as commercial and recreational fishermen who frequent the area, to gain awareness of changes in the site

Table 5-1: Summary of risk factors for the *Mormackite*.

Vessel Risk Factors Vessel Risk Factors		Data Quality Score	Comments		Risk Score	
Pollution Potential	A1: Oil Volume (total bbl)	Medium	Maximum of 5,145 bbl, not reported to be	eaking		
	A2: Oil Type	High	Bunker oil is heavy fuel oil, a Group IV oil type		-	
	B: Wreck Clearance	High	Vessel not reported as cleared			
	C1: Burning of the Ship	High	No fire was reported	High		
Factors	C2: Oil on Water High No oil was reported on the water				-	
	D1: Nature of Casualty	High	Cargo shifted in rough seas			
	D2: Structural Breakup	High	Unknown structural breakup		-	
Archaeological Assessment	Archaeological Assessment	Low	The best sinking assessment comes from the U.S. Coast Guard; no archaeological assessment was prepared		Not Scored	
	Wreck Orientation	Low	Unknown, potential to be upright			
	Depth	Low	>11,500 ft			
	Visual or Remote Sensing Confirmation of Site Condition	Low	Location unknown			
Operational Factors	Other Hazardous Materials Onboard	High	No		Not Scored	
	Munitions Onboard	High	No			
	Gravesite (Civilian/Military)	High	Yes			
	Historical Protection Eligibility (NHPA/SMCA)	High	NHPA			
				WCD	Most Probable	
Ecological Resources	3A: Water Column Resources	High	Area of water column affected above thresholds are relatively small and far offshore where sensitive resources are less concentrated	Low	Low	
	3B: Water Surface Resources	High	Heavy fuel oil forms persistent tarballs that can travel long distances posing risks to birds and sea turtles, esp. when concentrated in convergence zones and Sargassum	High	Med	
	3C: Shore Resources	High	Limited amount of sand beach at risk of stranding by heavily weathered oil	Low	Low	
	4A: Water Column Resources	High	Moderate impact to a relatively small area of important fishing grounds.	Low	Low	
Socio- Economic Resources	4B: Water Surface Resources	High	Moderate offshore area of relatively moderate port traffic and other offshore activities would be affected	Med	Med	
	4C: Shore Resources	High	Moderate amount of shoreline would be impacted, with a many vulnerable socio-economic resources at risk	Med	Med	
Summary Risk Scores 13					12	