


Screening Level Risk Assessment Package Rawleigh Warner



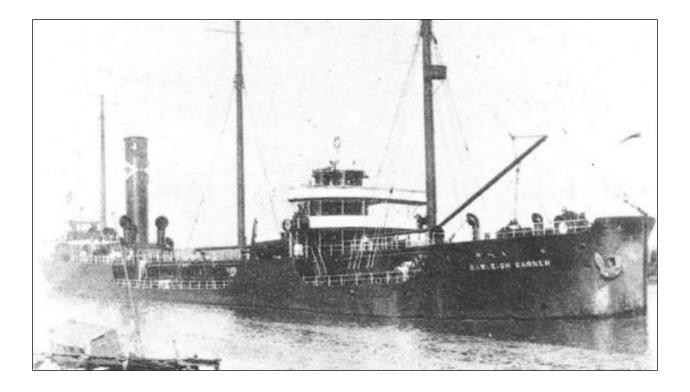

National Oceanic and Atmospheric Administration

Office of National Marine Sanctuaries Daniel J. Basta, Director Lisa Symons John Wagner

Office of Response and Restoration Dave Westerholm, Director Debbie Payton Doug Helton

Photo: Photograph of *Rawleigh Warner* Source: http://www.uboat.net/allies/merchants/ships/1840.html



Table of Contents

Project Background	ii
Executive Summary	1
Section 1: Vessel Background Information: Remediation of Underwater Legacy	
Environmental Threats (RULET)	
Vessel Particulars	
Casualty Information	
Wreck Location	
Casualty Narrative	
General Notes	
Wreck Condition/Salvage History Archaeological Assessment	
Archaeological Assessment	
Background Information References	
Vessel Risk Factors	
	•
Section 2: Environmental Impact Modeling	13
Release Scenarios Used in the Modeling	13
Oil Type for Release	
Oil Thickness Thresholds	
Potential Impacts to the Water Column	16
Potential Water Surface Slick	
Potential Shoreline Impacts	19
Section 3: Ecological Resources At Risk	20
Ecological Risk Factors	
	20
Section 4: Socio-Economic Resources At Risk	28
Socio-Economic Risk Factors	31
Section 5: Overall Risk Assessment and Recommendations for Assessment,	
Monitoring, or Remediation	36

Project Background

The past century of commerce and warfare has left a legacy of thousands of sunken vessels along the U.S. coast. Many of these wrecks pose environmental threats because of the hazardous nature of their cargoes, presence of munitions, or bunker fuel oils left onboard. As these wrecks corrode and decay, they may release oil or hazardous materials. Although a few vessels, such as USS *Arizona* in Hawaii, are well-publicized environmental threats, most wrecks, unless they pose an immediate pollution threat or impede navigation, are left alone and are largely forgotten until they begin to leak.

In order to narrow down the potential sites for inclusion into regional and area contingency plans, in 2010, Congress appropriated \$1 million to identify the most ecologically and economically significant potentially polluting wrecks in U.S. waters. This project supports the U.S. Coast Guard and the Regional Response Teams as well as NOAA in prioritizing threats to coastal resources while at the same time assessing the historical and cultural significance of these nonrenewable cultural resources.


The potential polluting shipwrecks were identified through searching a broad variety of historical sources. NOAA then worked with Research Planning, Inc., RPS ASA, and Environmental Research Consulting to conduct the modeling forecasts, and the ecological and environmental resources at risk assessments.

Initial evaluations of shipwrecks located within American waters found that approximately 600-1,000 wrecks could pose a substantial pollution threat based on their age, type and size. This includes vessels sunk after 1891 (when vessels began being converted to use oil as fuel), vessels built of steel or other durable material (wooden vessels have likely deteriorated), cargo vessels over 1,000 gross tons (smaller vessels would have limited cargo or bunker capacity), and any tank vessel.

Additional ongoing research has revealed that 87 wrecks pose a potential pollution threat due to the violent nature in which some ships sank and the structural reduction and demolition of those that were navigational hazards. To further screen and prioritize these vessels, risk factors and scores have been applied to elements such as the amount of oil that could be on board and the potential ecological or environmental impact.

Executive Summary: Rawleigh Warner

The tanker *Rawleigh Warner*, torpedoed and sunk during World War II at the mouth of the Mississippi River, Louisiana in 1942, was identified as a potential pollution threat, thus a screening-level risk assessment was conducted. The different sections of this document summarize what is known about the *Rawleigh Warner*, the results of environmental impact modeling composed of different release scenarios, the ecological and socioeconomic resources that would be at risk in the event of releases, the

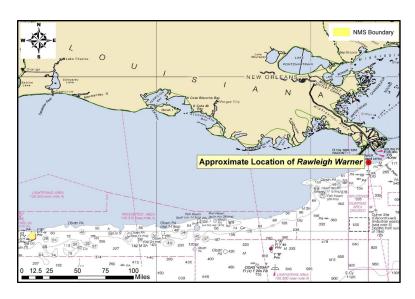

screening-level risk scoring results and overall risk assessment, and recommendations for assessment, monitoring, or remediation.

Based on this screening-level assessment, each vessel was assigned a summary score calculated using the seven risk criteria described in this report. For the Worst Case Discharge, Rawleigh Warner scores Low with 11 points; for the Most Probable Discharge (10% of the Worse Case volume), Rawleigh Warner also scores Low with 9 points. Given these scores, the low level of data certainty, and the unknown location of the vessel, NOAA recommends that this site be noted in the Area Contingency Plans as necessary to answer future questions about the pollution risks associated with this particular vessel, and so that if a mystery spill is reported in the general area, this vessel could be investigated as a source. Outreach efforts with the technical and recreational dive community as well as commercial and recreational fishermen who frequent the area would be helpful to gain awareness of localized spills in the general area where the vessel is believed lost.

Ve	ssel Risk Factors	Ris	k Score
	A1: Oil Volume (total bbl)		
	A2: Oil Type		
Pollution	B: Wreck Clearance		
Potential	C1: Burning of the Ship		Med
Factors	C2: Oil on Water		
	D1: Nature of Casualty		
	D2: Structural Breakup		
Archaeological Assessment	Archaeological Assessment	Not	Scored
	Wreck Orientation		
	Depth	Not Scored	
	Confirmation of Site Condition		
Operational Factors	Other Hazardous Materials		
1 401010	Munitions Onboard		
	Gravesite (Civilian/Military)		
	Historical Protection Eligibility		
		WCD	MP (10%)
	3A: Water Column Resources	Low	Low
Ecological Resources	3B: Water Surface Resources	Med Low	
	3C: Shore Resources	Low Low	
Socio-	4A: Water Column Resources	Low Low	
Economic	4B: Water Surface Resources	Med	Low
Resources	4C: Shore Resources	Med	Med
Summary Risk S	cores	11	9

The determination of each risk factor is explained in the document. This summary table is found on page 37.

SECTION 1: VESSEL BACKGROUND INFORMATION: REMEDIATION OF UNDERWATER LEGACY ENVIRONMENTAL THREATS (RULET)

Г


- 18

Vessel Particulars

Official Name: Rawleigh Warner		A.
Official Number: 210519		
Vessel Type: Tanker		- THE PARTY OF THE
Vessel Class: 3,664 gross ton class ta	anker	Land I and the second second
Former Names: Rayo	All market in	HALF HERE
Year Built: 1912		
Builder: New York Shipbuilding, Ca	amden, NJ	
Builder's Hull Number: 123		
Flag: American		
Owner at Loss: Sabine Transportation	on Co Inc, Port Arthur TX	
Controlled by: Unknown	Chartered to: United	States War Shipping Administration
Operated by: Unknown		
Homeport: Baltimore, MD		
Length: 321 feet	Beam: 46 feet	Depth: 27 feet
Gross Tonnage: 3,664		Net Tonnage: 2,223
Hull Material: Steel	Hull Fastenings: Riveted	Powered by: Oil-fired steam
Bunker Type: Heavy fuel oil (Bunke	er C)	Bunker Capacity (bbl): 2,900
Average Bunker Consumption (bb	l) per 24 hours: 127	
Liquid Cargo Capacity (bbl): 39,00	00	Dry Cargo Capacity: Unknown
Tank or Hold Description: Unknow	/n	

Casualty Information

Port Departed: Sabine Pass, TX	Destination Port: Port St. Joe, FL
Date Departed: July 21, 1942	Date Lost: June 23, 1942
Number of Days Sailing: ≈ 3	Cause of Sinking: Act of War (Torpedoes)
Latitude (DD): 28.88357	Longitude (DD): -89.25005
Nautical Miles to Shore: 8.2	Nautical Miles to NMS: 266
Nautical Miles to MPA: 0	Nautical Miles to Fisheries: Unknown
Approximate Water Depth (Ft): 260	Bottom Type: Unknown
Is There a Wreck at This Location? Unknown, this wreck surveyed	is not known to have ever been discovered or
Wreck Orientation: Unknown	
Vessel Armament: None	
Cargo Carried when Lost: 38,909 bbl of gasoline	
Cargo Oil Carried (bbl): 38,909	Cargo Oil Type: Light fuel oil
Probable Fuel Oil Remaining (bbl): $\leq 2,900$	Fuel Type: Heavy fuel oil (Bunker C)
Total Oil Carried (bbl): $\leq 41,809$	Dangerous Cargo or Munitions: No
Munitions Carried: None	
Demolished after Sinking: Unknown	Salvaged: No
Cargo Lost: Yes	Reportedly Leaking: No
Historically Significant: Yes	Gravesite: Yes
Salvage Owner: Not known if any	

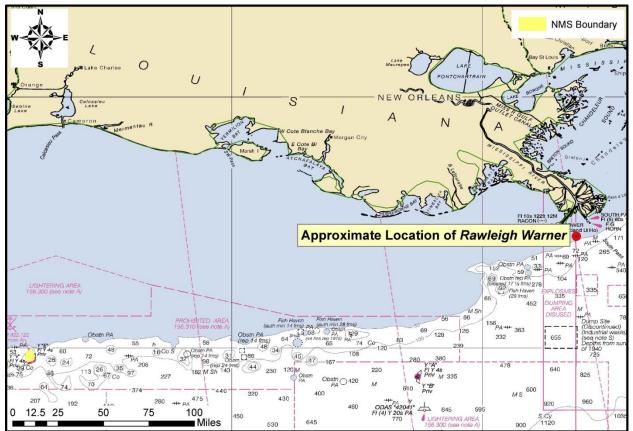

Wreck Location

Chart Number: 411

Casualty Narrative

"At 06.11 hours on 23 Jun, 1942, the unescorted and unarmed *Rawleigh Warner* (Master Jewel Homer Levingston) was hit by two torpedoes from *U*-67 about 40 miles south of South Pass, Louisiana. The cargo immediately burst into flames and engulfed the entire length of the ship. The tanker sank in less than ten minutes, leaving no survivors among the eight officers and 25 crewmen on board." -http://www.uboat.net:8080/allies/merchants/ships/1840.html

Under Captain Jewel Homer Levingston, the ship departed Smiths Bluff, TX and was struck by *U*-67 (Muller-Stockheim) about 40 miles south of South Pass, Louisiana en route to St. Joe, FL. The torpedo caused a huge explosion and the gas cargo burst into flames and engulfed the entire length of the ship. The ship sank in less than 10 minutes and no one survived (33).

-B.M. Browning Jr., "U.S. Merchant Vessel War Casualties of World War II", (Naval Institute Press, 1996), 153-154.

-M. Wiggins "Torpedoes in the Gulf: Galveston and the U-Boats 1942-1943" Texas A&M University Press, College Station (1995), 98, 100.

General Notes

AWOIS Data: ****THIS WRECK IS CHARTED ONLY ON 11360 AND 11340**** DESCRIPTION 20 TKR., 3663 TONS, TORPEDOED 6/42 WITH 38,909 BARRELS OF GASOLINE ON BOARD, IN 266 FT. OF WATER. 61 6/23/42 24 NO.820; TANKER, 3664 GT; SUNK 6/23/42 BY SUBMARINE; POS. ACCURACY 1-3 MILES

Wreck Condition/Salvage History

Unknown; NOAA has been unable to find any evidence that suggests this wreck has been located.

Archaeological Assessment

The archaeological assessment provides additional primary source based documentation about the sinking of vessels. It also provides condition-based archaeological assessment of the wrecks when possible. It does not provide a risk-based score or definitively assess the pollution risk or lack thereof from these vessels, but includes additional information that could not be condensed into database form.

Where the current condition of a shipwreck is not known, data from other archaeological studies of similar types of shipwrecks provide the means for brief explanations of what the shipwreck might look like and specifically, whether it is thought there is sufficient structural integrity to retain oil. This is more subjective than the Pollution Potential Tree and computer-generated resource at risk models, and as such provides an additional viewpoint to examine risk assessments and assess the threat posed by these shipwrecks. It also addresses questions of historical significance and the relevant historic preservation laws and regulations that will govern on-site assessments.

In some cases where little additional historic information has been uncovered about the loss of a vessel, archaeological assessments cannot be made with any degree of certainty and were not prepared. For vessels with full archaeological assessments, NOAA archaeologists and contracted archivists have taken photographs of primary source documents from the National Archives that can be made available for future research or on-site activities.

Assessment

The tanker *Rawleigh Warner* was sunk by German Submarine *U*-67 off the coast of Louisiana on June 23, 1942. At the time of its loss, the ship was carrying 38,909 bbl of gasoline and had a bunker capacity of 2,900 bbl of Bunker C fuel oil. As the ship travelled from Sabine Pass, Texas destined for Port St. Joe, Florida, it was struck by two torpedoes. The torpedoes struck with such force that the cargo of gasoline immediately exploded and set the tanker on fire, killing all members of the tanker's crew. Although the damage inflicted by the torpedoes could not be assessed since there were no survivor reports of the attack, the tanker was last seen in flames east of Southwest Pass, Louisiana.

Based on the damage caused by the torpedoes, it is likely that many of the cargo tanks were damaged or breached by the torpedo blasts and no longer contain gasoline. This may also be the case since the vessel was believed to have eventually sunk in shallow water and may have been demolished as a hazard to navigation or used as a training target for aerial bombs dropped by Allied aircraft. Since the shipwreck has never been located or surveyed, however, a condition-based assessment of the wreck cannot be made. If the wreckage of *Rawleigh Warner* is ever located and the U.S. Coast Guard decides to assess the wreck, it should first contact archaeologists with the Bureau of Ocean Energy Management (BOEM) and Bureau of Safety and Environmental Enforcement (BSEE) for more information as well as to ensure compliance with archaeological standards for assessing a historic resource. It should also be noted that this vessel is of historic significance and will require appropriate actions be taken under the National Historic Preservation Act (NHPA) and possibly the Sunken Military Craft Act (SMCA) prior to any actions that could impact the integrity of the vessel. This vessel may be eligible for listing on the National Register of Historic Places and is considered a war grave and appropriate actions should be undertaken to minimize disturbance to the site.

Background Information References

Vessel Image Sources: http://www.uboat.net/allies/merchants/ships/1840.html

Construction Diagrams or Plans in RULET Database? No

Text References:

-Office of the Chief of Naval Operations

1942 Tenth Fleet ASW Analysis & Stat. Section Series XIII. Report and Analyses of U. S. and Allied Merchant Shipping Losses 1941-1945 Rampant – Robert Erskine, Records of the Office of the Chief of Naval Operations, Box 244, Record Group 38, National Archives at College Park, MD.

-AWOIS No. 291

-Coast Guard ID 5968

-http://www.uboat.net/allies/merchants/ships/1840.html;

-B.M. Browning Jr., "U.S. Merchant Vessel War Casualties of World War II", (Naval Institute Press, 1996), 153-154.


-M. Wiggins "Torpedoes in the Gulf: Galveston and the U-Boats 1942-1943" Texas A&M University Press, College Station (1995), 98, 100.

Vessel Risk Factors

In this section, the risk factors that are associated with the vessel are defined and then applied to the *Rawleigh Warner* based on the information available. These factors are reflected in the pollution potential risk assessment development by the U.S. Coast Guard Salvage Engineering Response Team (SERT) as a means to apply a salvage engineer's perspective to the historical information gathered by NOAA. This analysis reflected in Figure 1-1 is simple and straightforward and, in combination with the accompanying archaeological assessment, provides a picture of the wreck that is as complete as possible based on current knowledge and best professional judgment. This assessment <u>does not</u> take into consideration operational constraints such as depth or unknown location, but rather attempts to provide a replicable and objective screening of the historical date for each vessel. SERT reviewed the general historical

information available for the database as a whole and provided a stepwise analysis for an initial indication of Low/Medium/High values for each vessel.

In some instances, nuances from the archaeological assessment may provide additional input that will amend the score for Section 1. Where available, additional information that may have bearing on operational considerations for any assessment or remediation activities is provided.

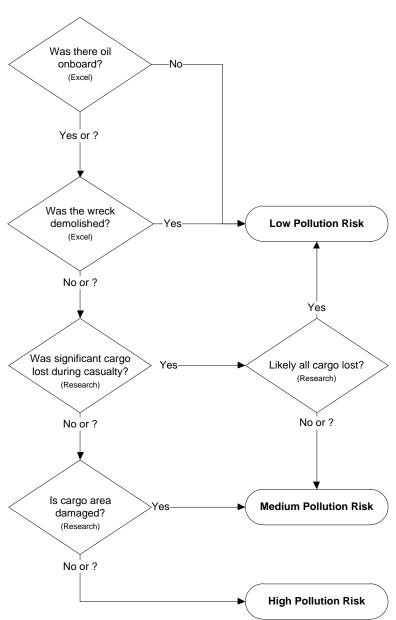

Pollution Potential Tree

Figure 1-1: U.S. Coast Guard Salvage Engineering Response Team (SERT) developed the above Pollution Potential Decision Tree.

Each risk factor is characterized as High, Medium, or Low Risk or a category-appropriate equivalent such as No, Unknown, Yes, or Yes Partially. The risk categories correlate to the decision points reflected in Figure 1-1.

Each of the risk factors also has a "data quality modifier" that reflects the completeness and reliability of the information on which the risk ranks were assigned. The quality of the information is evaluated with respect to the factors required for a reasonable preliminary risk assessment. The data quality modifier scale is:

- **High Data Quality:** All or most pertinent information on wreck available to allow for thorough risk assessment and evaluation. The data quality is high and confirmed.
- **Medium Data Quality:** Much information on wreck available, but some key factor data are missing or the data quality is questionable or not verified. Some additional research needed.
- Low Data Quality: Significant issues exist with missing data on wreck that precludes making preliminary risk assessment, and/or the data quality is suspect. Significant additional research needed.

In the following sections, the definition of low, medium, and high for each risk factor is provided. Also, the classification for the *Rawleigh Warner* is provided, both as text and as shading of the applicable degree of risk bullet.

Pollution Potential Factors

Risk Factor A1: Total Oil Volume

The oil volume classifications correspond to the U.S. Coast Guard spill classifications:

- Low Volume: Minor Spill <240 bbl (10,000 gallons)
- Medium Volume: Medium Spill $\geq 240 2,400$ bbl (100,000 gallons)
- **High Volume: Major Spill** $\geq 2,400$ bbl ($\geq 100,000$ gallons)

The oil volume risk classifications refer to the volume of the most-likely Worst Case Discharge from the vessel and are based on the amount of oil believed or confirmed to be on the vessel.

The *Rawleigh Warner* is ranked as High Volume because it is thought to have a potential for up to 2,900 bbl, although some of that may have been lost at the time of the casualty or after the vessel sank. Data quality is medium.

The risk factor for volume also incorporates any reports or anecdotal evidence of actual leakage from the vessel or reports from divers of oil in the overheads, as opposed to potential leakage. This reflects the history of the vessel's leakage. There are no reports of leakage from the *Rawleigh Warner*.

Risk Factor A2: Oil Type

The oil type(s) on board the wreck are classified only with regard to persistence, using the U.S. Coast

Guard oil grouping¹. (Toxicity is dealt with in the impact risk for the Resources at Risk classifications.) The three oil classifications are:

- Low Risk: Group I Oils non-persistent oil (e.g., gasoline)
- Medium Risk: Group II III Oils medium persistent oil (e.g., diesel, No. 2 fuel, light crude, medium crude)
- High Risk: Group IV high persistent oil (e.g., heavy crude oil, No. 6 fuel oil, Bunker C)

The *Rawleigh Warner* is classified as High Risk because the bunker oil is heavy fuel oil, a Group IV oil type. The cargo of gasoline was assumed to have been released during the casualty or after the vessel sank. Data quality is high.

Was the wreck demolished?

Risk Factor B: Wreck Clearance

This risk factor addresses whether or not the vessel was historically reported to have been demolished as a hazard to navigation or by other means such as depth charges or aerial bombs. This risk factor is based on historic records and does not take into account what a wreck site currently looks like. The risk categories are defined as:

- Low Risk: The site was reported to have been entirely destroyed after the casualty
- **Medium Risk:** The wreck was reported to have been partially cleared or demolished after the casualty
- High Risk: The wreck was not reported to have been cleared or demolished after the casualty
- **Unknown:** It is not known whether or not the wreck was cleared or demolished at the time of or after the casualty

The *Rawleigh Warner* is classified as High Risk because there are no known historic accounts of the wreck being demolished as a hazard to navigation. Data quality is high.

Was significant cargo or bunker lost during casualty?

Risk Factor C1: Burning of the Ship

This risk factor addresses any burning that is known to have occurred at the time of the vessel casualty and may have resulted in oil products being consumed or breaks in the hull or tanks that would have increased the potential for oil to escape from the shipwreck. The risk categories are:

- Low Risk: Burned for multiple days
- Medium Risk: Burned for several hours
- High Risk: No burning reported at the time of the vessel casualty
- Unknown: It is not known whether or not the vessel burned at the time of the casualty

¹ Group I Oil or Nonpersistent oil is defined as "a petroleum-based oil that, at the time of shipment, consists of hydrocarbon fractions: At least 50% of which, by volume, distill at a temperature of 340°C (645°F); and at least 95% of which, by volume, distill at a temperature of 370°C (700°F)."

Group II - Specific gravity less than 0.85 crude [API° >35.0]

Group III - Specific gravity between 0.85 and less than .95 [API° ≤35.0 and >17.5]

Group IV - Specific gravity between 0.95 to and including 1.0 [API° ≤17.5 and >10.0]

The *Rawleigh Warner* is classified as Medium Risk because a significant fire was reported at the time of the casualty. Data quality is high.

Risk Factor C2: Reported Oil on the Water

This risk factor addresses reports of oil on the water at the time of the vessel casualty. The amount is relative and based on the number of available reports of the casualty. Seldom are the reports from trained observers so this is very subjective information. The risk categories are defined as:

- Low Risk: Large amounts of oil reported on the water by multiple sources
- Medium Risk: Moderate to little oil reported on the water during or after the sinking event
- High Risk: No oil reported on the water
- Unknown: It is not know whether or not there was oil on the water at the time of the casualty

The *Rawleigh Warner* is classified as Medium Risk because oil was reported to have spread across the water as the vessel went down. Data quality is high.

Is the cargo area damaged?

Risk Factor D1: Nature of the Casualty

This risk factor addresses the means by which the vessel sank. The risk associated with each type of casualty is determined by the how violent the sinking event was and the factors that would contribute to increased initial damage or destruction of the vessel (which would lower the risk of oil, other cargo, or munitions remaining on board). The risk categories are:

- Low Risk: Multiple torpedo detonations, multiple mines, severe explosion
- Medium Risk: Single torpedo, shellfire, single mine, rupture of hull, breaking in half, grounding on rocky shoreline
- **High Risk:** Foul weather, grounding on soft bottom, collision
- Unknown: The cause of the loss of the vessel is not known

The *Rawleigh Warner* is classified as Low Risk because there were multiple torpedo detonations. Data quality is high.

Risk Factor D2: Structural Breakup

This risk factor takes into account how many pieces the vessel broke into during the sinking event or since sinking. This factor addresses how likely it is that multiple components of a ship were broken apart including tanks, valves, and pipes. Experience has shown that even vessels broken in three large sections can still have significant pollutants on board if the sections still have some structural integrity. The risk categories are:

- Low Risk: The vessel is broken into more than three pieces
- Medium Risk: The vessel is broken into two-three pieces
- High Risk: The vessel is not broken and remains as one contiguous piece
- Unknown: It is currently not known whether or not the vessel broke apart at the time of loss or after sinking

The *Rawleigh Warner* is classified as Unknown Risk because it is not known whether additional structural breakup occurred since the location is unknown. Data quality is low.

Factors That May Impact Potential Operations

Orientation (degrees)

This factor addresses what may be known about the current orientation of the intact pieces of the wreck (with emphasis on those pieces where tanks are located) on the seafloor. For example, if the vessel turtled, not only may it have avoided demolition as a hazard to navigation, but it has a higher likelihood of retaining an oil cargo in the non-vented and more structurally robust bottom of the hull.

The location of the Rawleigh Warner is unknown. Data quality is low.

Depth

Depth information is provided where known. In many instances, depth will be an approximation based on charted depths at the last known locations.

The depth for the *Rawleigh Warner* is believed to be approximately 260 feet based on the last known location. Data quality is low.

Visual or Remote Sensing Confirmation of Site Condition

This factor takes into account what the physical status of wreck site as confirmed by remote sensing or other means such as ROV or diver observations and assesses its capability to retain a liquid cargo. This assesses whether or not the vessel was confirmed as entirely demolished as a hazard to navigation, or severely compromised by other means such as depth charges, aerial bombs, or structural collapse.

The location of the *Rawleigh Warner* is unknown. Data quality is low.

Other Hazardous (Non-Oil) Cargo on Board

This factor addresses hazardous cargo other than oil that may be on board the vessel and could potentially be released, causing impacts to ecological and socio-economic resources at risk.

There are no reports of hazardous materials onboard. Data quality is high.

Munitions on Board

This factor addresses hazardous cargo other than oil that may be on board the vessel and could potentially be released or detonated causing impacts to ecological and socio-economic resources at risk.

The Rawleigh Warner did not carry any munitions. Data quality is high.

Vessel Pollution Potential Summary

Table 1-1 summarizes the risk factor scores for the pollution potential and mitigating factors that would reduce the pollution potential for the *Rawleigh Warner*. Operational factors are listed but do not have a risk score.

Vessel Risk Factors		Data Quality Score	Comments	Risk Score
	A1: Oil Volume (total bbl)	Medium	Maximum of 2,900 bbl, not reported to be leaking	
	A2: Oil Type	High	Bunker fuel is a heavy fuel oil, a Group IV oil type	
B: Wreck Clearance		High	Vessel not reported as cleared	
Pollution Potential	C1: Burning of the Ship	High	Significant fire was reported	Med
Factors	C2: Oil on Water	High	Oil was reported on the water; amount is not known	incu
	D1: Nature of Casualty	High	Multiple torpedo detonations	
	D2: Structural Breakup	Low	Unknown structural breakup	
Archaeological Assessment	Archaeological Assessment	Medium	Detailed sinking records of this ship exist but no site reports exist, assessment is believed to be moderately accurate	Not Scored
	Wreck Orientation	Low	Unknown	
	Depth	Low	>250 ft	
	Visual or Remote Sensing Confirmation of Site Condition	Low		
Operational Factors	Other Hazardous Materials Onboard	High	igh No	
	Munitions Onboard	High	No	
	Gravesite (Civilian/Military)	High Yes		
	Historical Protection Eligibility (NHPA/SMCA)	High	5	

 Table 1-1: Summary matrix for the vessel risk factors for the Rawleigh Warner color-coded as red (high risk), yellow (medium risk), and green (low risk).

SECTION 2: ENVIRONMENTAL IMPACT MODELING

To help evaluate the potential transport and fates of releases from sunken wrecks, NOAA worked with RPS ASA to run a series of generalized computer model simulations of potential oil releases. The results are used to assess potential impacts to ecological and socio-economic resources, as described in Sections 3 and 4. The modeling results are useful for this screening-level risk assessment; however, it should be noted that detailed site/vessel/and seasonally specific modeling would need to be conducted prior to any intervention on a specific wreck.

Release Scenarios Used in the Modeling

The potential volume of leakage at any point in time will tend to follow a probability distribution. Most discharges are likely to be relatively small, though there could be multiple such discharges. There is a lower probability of larger discharges, though these scenarios would cause the greatest damage. A **Worst Case Discharge** (WCD) would involve the release of all of the cargo oil and bunkers present on the vessel. In the case of the *Rawleigh Warner*, because it is likely that most of the cargo or gasoline burned, this would be about 3,000 bbl of heavy fuel oil (rounded up from 2,900 bbl) based on estimates of the amount of bunkers remaining onboard.

The likeliest scenario of oil release from most sunken wrecks, including the *Rawleigh Warner*, is a small, episodic release that may be precipitated by disturbance of the vessel in storms. Each of these episodic releases may cause impacts and require a response. **Episodic** releases are modeled using 1% of the WCD. Another scenario is a very low chronic release, i.e., a relatively regular release of small amounts of oil that causes continuous oiling and impacts over the course of a long period of time. This type of release would likely be precipitated by corrosion of piping that allows oil to flow or bubble out at a slow, steady rate. **Chronic** releases are modeled using 0.1% of the WCD.

The **Most Probable** scenario is premised on the release of all the oil from one tank. In the absence of information on the number and condition of the cargo or fuel tanks for all the wrecks being assessed, this scenario is modeled using 10% of the WCD. The **Large** scenario is loss of 50% of the WCD. The five major types of releases are summarized in Table 2-1. The actual type of release that occurs will depend on the condition of the vessel, time factors, and disturbances to the wreck. Note that episodic and chronic release scenarios represent a small release that is repeated many times, potentially repeating the same magnitude and type of impact(s) with each release. The actual impacts would depend on the environmental factors such as real-time and forecast winds and currents during each release and the types/quantities of ecological and socio-economic resources present.

The model results here are based on running the RPS ASA Spill Impact Model Application Package (SIMAP) two hundred times for each of the five spill volumes shown in Table 2-1. The model randomly selects the date of the release, and corresponding environmental, wind, and ocean current information from a long-term wind and current database.

When a spill occurs, the trajectory, fate, and effects of the oil will depend on environmental variables, such as the wind and current directions over the course of the oil release, as well as seasonal effects. The

magnitude and nature of potential impacts to resources will also generally have a strong seasonal component (e.g., timing of bird migrations, turtle nesting periods, fishing seasons, and tourism seasons).

Scenario Type	Release per Episode	Time Period	Release Rate	Relative Likelihood	Response Tier
Chronic (0.1% of WCD)	3 bbl	Fairly regular intervals or constant	100 bbl over several daysMore likelyTier 1		Tier 1
Episodic (1% of WCD)	30 bbl	Irregular intervals	Over several hours or days	Most Probable	Tier 1-2
Most Probable (10% of WCD)	300 bbl	One-time release	Over several hours or days	Most Probable	Tier 2
Large (50% of WCD)	1,500 bbl	One-time release	Over several hours or days	Less likely	Tier 2-3
Worst Case	3,000 bbl	One-time release	Over several hours or days	Least likely	Tier 3

Table 2-1: Potential oil release scenario types for the Rawleigh Warner.

The modeling results represent 200 simulations for each spill volume with variations in spill trajectory based on winds and currents. The spectrum of the simulations gives a perspective on the variations in likely impact scenarios. Some resources will be impacted in nearly all cases; some resources may not be impacted unless the spill trajectory happens to go in that direction based on winds and currents at the time of the release and in its aftermath.

For the large and WCD scenarios, the duration of the release was assumed to be 12 hours, envisioning a storm scenario where the wreck is damaged or broken up, and the model simulations were run for a period of 30 days. The releases were assumed to be from a depth between 2-3 meters above the sea floor, using the information known about the wreck location and depth.

As discussed in the NOAA 2013 Risk Assessment for Potentially Polluting Wrecks in U.S. Waters, NOAA identified 87 high and medium priority wrecks for screening-level risk assessment. Within the available funds, it was not feasible to conduct computer model simulations of all 87 high and medium priority wrecks. Therefore, efforts were made to create "clusters" of vessels in reasonable proximity and with similar oil types. In general, the wreck with the largest potential amount of oil onboard was selected for modeling of oil release volumes, and the results were used as surrogates for the other vessels in the cluster. In particular, the regression curves created for the modeled wreck were used to determine the impacts to water column, water surface, and shoreline resources. The *Rawleigh Warner*, with up to 2,900 bbl of heavy fuel onboard, was clustered with the *R.W. Gallagher*, which was modeled at 86,000 bbl of heavy fuel oil. Figure 2-1 shows the location of both vessels.

It is important to acknowledge that these scenarios are only for this screening-level assessment. Detailed site/vessel/and seasonally specific modeling would need to be conducted prior to any intervention on a specific wreck.

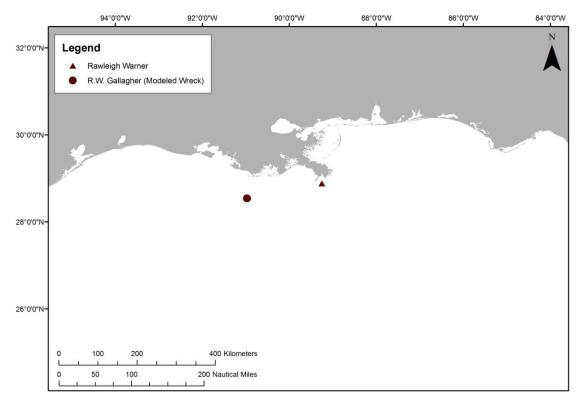


Figure 2-1: Location of the *Rawleigh Warner* (red triangle), the wreck discussed in this package, and the *R.W. Gallagher* (red circle) which was the wreck that was actually modeled in the computer modeling simulations. The results for the *R.W. Gallagher* are used to estimate the impacts of releases from the *Rawleigh Warner*, as discussed in the text.

Oil Type for Release

The *Rawleigh Warner* contained a maximum of 2,900 bbl of heavy fuel oil as the fuel (Group IV oil). Thus, the spill model for the *R.W. Gallagher*, which was run using heavy fuel oil, was used for this scoping assessment of the *Rawleigh Warner*.

Oil Thickness Thresholds

The model results are reported for different oil thickness thresholds, based on the amount of oil on the water surface or shoreline and the resources potentially at risk. Table 2-2 shows the terminology and thicknesses used in this report, for both oil thickness on water and the shoreline. For oil on the water surface, a thickness of 0.01 g/m², which would appear as a barely visible sheen, was used as the threshold for socio-economic impacts because often fishing is prohibited in areas with any visible oil, to prevent contamination of fishing gear and catch. A thickness of 10 g/m² was used as the threshold for ecological impacts, primarily due to impacts to birds, because that amount of oil has been observed to be enough to mortally impact birds and other wildlife. In reality, it is very unlikely that oil would be evenly distributed on the water surface. Spilled oil is always distributed patchily on the water surface in bands or tarballs with clean water in between. So, Table 2-2a shows the number of tarballs per acre on the water surface for these oil thickness of 1 g/m² was used as the threshold for socio-economic impacts because of 1 g/m² was used as the threshold for socio-economic surface for these oil thickness of 1 g/m² was used as the threshold for socio-economic impacts because that amount of oil stranded onshore, a thickness of 1 g/m² was used as the threshold for socio-economic impacts because that amount of oil would conservatively trigger the need for shoreline cleanup on amenity

beaches. A thickness of 100 g/m^2 was used as the threshold for ecological impacts based on a synthesis of the literature showing that shoreline life has been affected by this degree of oiling.² Because oil often strands onshore as tarballs, Table 2-2a shows the number of tarballs per m² on the shoreline for these oil thickness thresholds, assuming that each tarball was a sphere that was 1 inch in diameter.

 Table 2-2a: Oil thickness thresholds used in calculating area of water impacted. Refer to Sections 3 and 4 for explanations of the thresholds for ecological and socio-economic resource impacts.

Oil Description	Sheen Appearance	Approximate Sheen Thickness		No. of 1 inch Tarballs	Threshold/Risk Factor
Oil Sheen	Barely Visible	0.00001 mm	0.01 g/m²	~5-6 tarballs per acre	Socio-economic Impacts to Water Surface/Risk Factor 4B-1 and 2
Heavy Oil Sheen	Dark Colors	0.01 mm	10 g/m ²	~5,000-6,000 tarballs per acre	Ecological Impacts to Water Surface/ Risk Factor 3B-1 and 2

 Table 2-2b: Oil thickness thresholds used in calculating miles of shoreline impacted. Refer to Sections 3 and 4 for explanations of the thresholds for ecological and socio-economic resource impacts.

Oil Description	Oil Appearance	Approximate Sheen Thickness		No. of 1 inch Tarballs	Threshold/Risk Factor
Oil Sheen/Tarballs	Dull Colors	0.001 mm	1 g/m ²	~0.12-0.14 tarballs/m²	Socio-economic Impacts to Shoreline Users/Risk Factor 4C-1 and 2
Oil Slick/Tarballs	Brown to Black	0.1 mm	100 g/m ²	~12-14 tarballs/m ²	Ecological Impacts to Shoreline Habitats/Risk Factor 3C-1 and 2

Potential Impacts to the Water Column

Impacts to the water column from an oil release from the *Rawleigh Warner* will be determined by the volume of leakage. Because oil from sunken vessels will be released at low pressures, the droplet sizes will be large enough for the oil to float to the surface. Therefore, impacts to water column resources will result from the natural dispersion of the floating oil slicks on the surface, which is limited to about the top 33 feet. The metric used for ranking impacts to the water column is the area of water surface in mi² that has been contaminated by 1 part per billion (ppb) oil to a depth of 33 feet. At 1 ppb, there are likely to be impacts to sensitive organisms in the water column and potential tainting of seafood, so this concentration is used as a screening threshold for both the ecological and socio-economic risk factors for water column resource impacts. To assist planners in understanding the scale of potential impacts for different leakage volumes, a regression curve was generated for the water column volume oiled using the five volume scenarios, which is shown in Figure 2-2, which is the regression curve for the *R.W. Gallagher*. Using this figure, the water column impacts can be estimated for any spill volume. On Figure 2-2, arrows are used to indicate the where the WCD for the *Rawleigh Warner* plots on the curve and how the area of the water column impact is determined.

² French, D., M. Reed, K. Jayko, S. Feng, H. Rines, S. Pavignano, T. Isaji, S. Puckett, A. Keller, F. W. French III, D. Gifford, J. McCue, G. Brown, E. MacDonald, J. Quirk, S. Natzke, R. Bishop, M. Welsh, M. Phillips and B.S. Ingram, 1996. The CERCLA type A natural resource damage assessment model for coastal and marine environments (NRDAM/CME), Technical Documentation, Vol. I - V. Office of Environmental Policy and Compliance, U.S. Dept. Interior, Washington, DC.

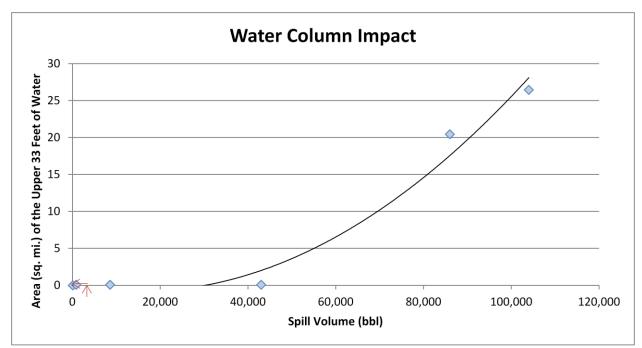


Figure 2-2: Regression curve for estimating the area of water column at or above 1 ppb aromatics impacted as a function of spill volume for the *Rawleigh Warner*. This regression curve was generated for the *R.W. Gallagher*, which has the same oil type as the *Rawleigh Warner*. The arrows indicate where the WCD for the *Rawleigh Warner* falls on the curve and how the area of water column impact can be determined for any spill volume.

Potential Water Surface Slick

The slick size from an oil release is a function of the quantity released. The estimated water surface coverage by a fresh slick (the total water surface area "swept" by oil over time) for the various scenarios is shown in Table 2-3, as the mean result of the 200 model runs for the *R.W. Gallagher* then using the regression curve shown in Figure 2-3 to calculate the values for the different release scenarios for the *Rawleigh Warner*. Note that this is an estimate of total water surface affected over a 30-day period. The slick will not be continuous but rather be broken and patchy. Surface expression is likely to be in the form of sheens, tarballs, and streamers. In the model, the representative heavy fuel oil used for this analysis spreads to a minimum thickness of approximately 975 g/m², and the oil is not able to spread any thinner, owing to its high viscosity. As a result, water surface oiling results are identical for the 0.01 and 10 g/m² thresholds. The location, size, shape, and spread of the oil slick(s) from an oil release from the *Rawleigh Warner* will depend on environmental conditions, including winds and currents, at the time of release and in its aftermath. Refer to the risk assessment package for the *R.W. Gallagher* for maps (Figs. 2-2 and 2-3) showing the areas potentially affected by slicks using the Most Probable volume and the socio-economic and ecological thresholds.

Scenario Type	Oil Volume (bbl)	Estimated Slick Area Swept Mean of All Models 0.01 g/m ² 10 g/m ²	
Chronic	3	63 mi ²	63 mi ²
Episodic	30	220 mi ²	220 mi ²
Most Probable	300	750 mi ²	750 mi ²
Large	1,500	1,800 mi ²	1,800 mi ²
Worst Case Discharge	3,000	2,600 mi ²	2,600 mi ²

Table 2-3: Estimated slick area swept on water for oil release scenarios from the Rawleigh Warner, based on the	
model results for the R.W. Gallagher.	

The actual area affected by a release will be determined by the volume of leakage, whether it is from one or more tanks at a time. To assist planners in understanding the scale of potential impacts for different leakage volumes, a regression curve was generated for the water surface area oiled using the five volume scenarios for the *R.W. Gallagher*, which is shown in Figure 2-3 and referenced in Table 2-3. Using this figure, the area of water surface with a barely visible sheen can be estimated for any spill volume from the *Rawleigh Warner*.

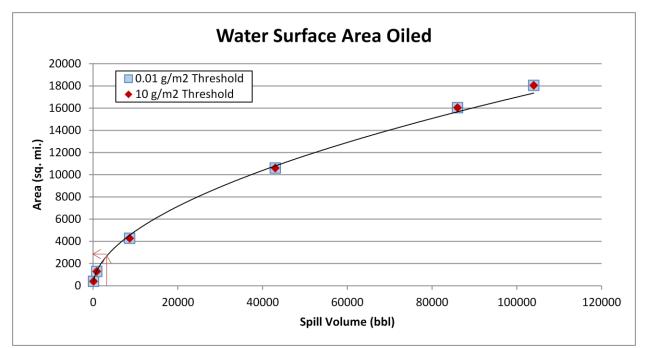


Figure 2-3: Regression curve for estimating the amount of water surface oiling as a function of spill volume for the *Rawleigh Warner*, showing both the ecological threshold of 10 g/m² and socio-economic threshold of 0.01 g/m², based on the model results for the *R.W. Gallagher*. The arrows indicate where the WCD for the *Rawleigh Warner* falls on the curve and how the area of water surface impact can be determined for any spill volume. The curves for each threshold are so similar that they plot on top of each other.

Potential Shoreline Impacts

Large

Worst Case Discharge

Based on these modeling results, shorelines from as far north as Maryland to as far south as Cape Canaveral, Florida are at risk. (Refer to Figure 2-6 in the *R.W. Gallagher* package to see the probability of oil stranding on the shoreline at concentrations that exceed the threshold of 1 g/m^2 , for the Most Probable release). However, the specific areas that would be oiled will depend on the currents and winds at the time of the oil release(s), as well as on the amount of oil released. Estimated miles of shoreline oiling above the socio-economic threshold of 1 g/m² and the ecological threshold of 100 g/m² by scenario type are shown in Table 2-4.

R.W. Gallagher.	-	•	-
Scenario Type	Volume (bbl)	Estimated Miles of Shoreline Oiling Above 1 g/m ²	Estimated Miles of Shoreline Oiling Above 100 g/m ²
Chronic	3 bbl	14	1
Episodic	30 bbl	18	2
Most Probable	300 bbl	25	4

1,500 bbl

3,000 bbl

31

34

8

11

Table 2-4: Estimated shoreline oiling from leakage from the Rawleigh Warner, based on the modeling results for the

The actual shore length affected by a release will be determined by the volume of leakage and environmental conditions during an actual release. To assist planners in scaling the potential impact for different leakage volumes, a regression curve was generated for the total shoreline length oiled using the five volume scenarios for the R.W. Gallagher, as detailed in Table 2-4 and shown in Figure 2-4. Using this figure, the shore length oiled can be estimated for any spill volume from the Rawleigh Warner.

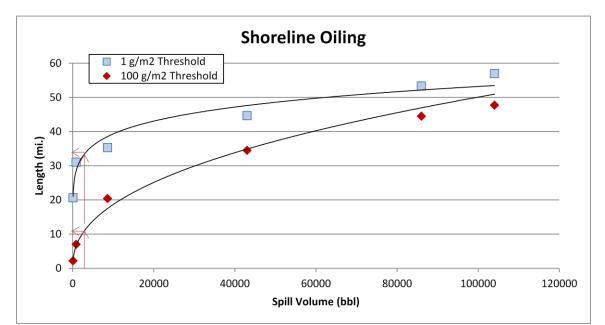


Figure 2-4: Regression curve for estimating the amount of shoreline oiling at different thresholds as a function of spill volume for the Rawleigh Warner, based on the model results for the R.W. Gallagher. The arrows indicate where the WCD for the *Rawleigh Warner* falls on the curve and how the area of shoreline impact can be determined for any spill volume.

SECTION 3: ECOLOGICAL RESOURCES AT RISK

Ecological resources at risk from a catastrophic release of oil from the *Rawleigh Warner* (Table 3-1) include numerous guilds of birds, particularly those sensitive to surface oiling while rafting or plunge diving to feed and are present in nearshore/offshore waters. Coastal marshes and barrier islands support large number of nesting shorebirds and wading birds and provide foraging grounds for overwintering shorebirds and waterfowl and migrating shorebirds and passerines. In addition, nearshore waters of the Gulf support highly productive coastal fisheries for both finfish and invertebrates. Kemp's ridley sea turtles use coastal waters heavily to travel between nesting beaches in South Texas and Mexico and foraging grounds near the Mississippi River Delta.

Species Group	Species Subgroup and Geography	Seasonal Presence
Coastal birds	 Louisiana bays are important habitat for wintering waterfowl, supporting densities of up to 900 birds per square mile Raptors (American kestrel, northern harriers, red-tailed hawk, turkey vulture, Cooper's hawk, osprey, bald eagle) can all be present in the coastal marshes Half of North American population of mottled duck inhabits Louisiana 	Ospreys present during winter Mottled duck nests Mar-Sep
Nesting and migratory hotspots	 Chandeleur Islands *bp = breeding pairs, otherwise numbers are individual bird counts Critical habitat for wintering piping plover (FT) Most abundant nesters: brown pelican (1,642 bp), laughing gull, Caspian tern, black skimmer (575 bp), royal tern (1-9,000 bp), sandwich tern (<33,000 bp) Redhead and lesser scaup are common Stopover for migratory birds <i>Mississippi Delta (Pass a Loutre State WMA, Delta NWR)</i> Nesting habitat for mottled duck (445), secretive marsh birds, wading birds and brown pelican (2-3,000 bp) High densities of king rails in the marsh Habitat for 100,000 wintering waterfowl, including canvasback (9,000), northern pintail (48,000), gadwall (36,000) Wintering habitat for western sandpiper, least sandpiper and dunlin <i>Barataria-Terrebonne Bays</i> Grand Isle State Park is important migratory bird and snowy plover stopover High abundances of overwintering blue and green-winged teal, American wigeon, ring-necked duck, lesser scaup, mallard, gadwall, and geese Piping plovers overwintering on Elmer's Island, W Grand Terre, and Fourchon east (~50 total) Nesting: Short-billed dowitcher (1,800), Wilson's plover (176 bp), black skimmer (899), gull-billed tern (>100), Forster's tern (600-900 bp), least tern (321 bp), little blue heron (2,690 bp, 7 colonies), white ibis (2,500), roseate spoonbill (125 bp) 	 Piping plover present Aug- May Wilson's plover nests May- Aug Short-billed dowitcher present in winter Roseate spoonbill nests Mar- Jul Mottled duck nests Mar-Sep Egrets nest Feb-Jul Ibises nest Apr-Aug Herons nest Mar-Aug Gulls nest Apr-Jul Skimmers nest May-Sep; Terns nest Apr-Sep Migrating shorebirds present spring and fall Wintering waterfowl present Oct-Mar

 Table 3-1: Ecological resources at risk from a release of oil from the Rawleigh Warner.

 (FT = Federal threatened; FE = Federal endangered; ST = State threatened; SE = State endangered)

Species Group	Species Subgroup and Geography	Seasonal Presence
	 Isle Dernieres and Timbalier Islands Raccoon Island has extremely high abundance of brown pelican, Wilson's plover, royal and sandwich tern, great, snowy and reddish egret, great blue and tricolored heron Important wintering piping plover (50-100), snowy plover (<100) habitat Stopover for long-billed curlew, red knot, and other shorebirds Emergency stopover for passerines Nesting: black skimmer (500 bp), sandwich tern (2,600 bp), least tern (50 bp), brown pelican (6,600 bp), Wilson's plover (150 bp) Atchafalaya Delta Very important for wintering waterfowl, wading birds, and black skimmer Marsh and scrub habitats important for rails, cranes, gulls, shorebirds, terns 	
	 Chenier Plain Shell Keys Isl. stopover for white pelicans (1,807), brown pelicans, terns, gulls > 400k overwintering ducks and geese Mottled duck (1,000-2,000) present Nesting: Forster's tern (800 bp), gull-billed tern (200 bp), black skimmer (400 bp), roseate spoonbill (200 bp) Piping plover (30), long-billed dowitcher (6,000) habitat present Bolivar Flats 	
	 100,000s of birds Resting and feeding location for migrating shorebirds (American avocet, American golden-plover, semipalmated plover, Wilson's plover, piping plover, snowy plover). Resident mottled duck Breeding roseate spoonbills (50) 	
	 Jigsaw Island Nesting: American oystercatcher (5 bp), black skimmer (10 bp), laughing gull (50 bp), Caspian tern (6 bp), royal terns (600 bp), sandwich tern (300 bp), tricolored heron 	
	<i>Mustang Bayou Island</i> – wading birds, black skimmer, gull-billed/royal terns nesting	
	 Sundown Island (West Matagorda) – 18 species of colonial nesting birds, including one of the largest colonies of reddish egret in Texas (15,000 bp) Nesting laughing gull (3,000 bp), royal tern (4,000 bp), sandwich tern (600 bp), tricolored heron (200 bp), brown pelican (2,000 bp), black skimmes, gull-billed tern, Caspian tern, reddish egret, little blue heron, snowy egret, great blue heron, great egret, cattle egret, white ibis, roseate spoonbill (these are all in lesser concentrations than above) 	
	 Laguna Vista spoils Nesting gull-billed tern, royal tern, sandwich tern (1,000s), reddish egret, black skimmer 	
	Pelagic distribution	

Species Group	Species Subgroup and Geography	Seasonal Presence
Species Group Sea Turtles	 Species Subgroup and Geography Convergence zones (thermoclines and warm core eddies) are areas of high biodiversity and abundance. Bird assemblages change seasonally Early summer - terns, storm-petrels and gulls common; jaegers and shearwaters less common; tropicbirds, sulids and frigatebirds rare Mid-summer - black terns are extremely common; band-rumped storm petrel, magnificent frigatebird, Audubon's shearwater, sooty tern present Late summer - high abundances of terns Fall - laughing gull, royal tern, Pomarine jaeger common Fall/winter - skuas present Winter - herring and laughing gulls common Nesting Kemp's ridley (FE, SE) high nest counts on North Padre Island (~100 nests/yr) and low (<25 nests/yr) from Galveston Bay to northern Mexico Densities of nesting Kemp's ridley sea turtles increase greatly (100s-1,000s per year) just south of the model extent; their major nesting ground is at Rancho Nuevo, Mexico Loggerheads (FT, ST) nest on the Chandeleur Islands and coastal Texas in low abundance Greens (FT, ST) nest on beaches north to North Padre Island in low 	Seasonal Presence Loggerheads nest May-Oct Kemp's ridley and Green nest Mar-Jul, hatch Apr-Sep Leatherbacks and hawksbills nest during the summer
Reptiles	 numbers Hawksbill (FE, SE) and leatherback (FE, SE) nesting can occur on Padre Island National Seashore but is extremely rare <i>Distribution</i> Coastal Louisiana is a major foraging ground for Kemp's ridley <i>Sargassum</i> is important habitat for juvenile sea turtles South Texas and northern Mexico inshore waters are important foraging grounds for juvenile green sea turtles Shelf waters are important adult habitat for loggerheads Rockefeller State Wildlife Refuge/Game Preserve has highest alligator nesting density in U.S. 	
	Diamondback terrapins can be found along the gulf shoreline in the area of impact	
Marine Mammals	Bottlenose dolphins (35-45k): Common in coastal waters including rivers, bays, and sounds throughout potential spill area. High concentrations in coastal Louisiana, especially around inlets and passes Whales and dolphins are often associated with shelf edge features, convergence zones, and <i>Sargassum</i> mats	Manatees present spring-fall
Terrestrial	Manatees can be present in low abundance in inland waters Northern river otter, mink, nutria and muskrat can all be present in marsh	
Mammals	habitats	
Fish	 Inshore distributions Marsh habitats are extremely productive and support high biodiversity and abundance of resident estuarine fish Estuarine areas important nursery grounds for many commercial species: red, mutton, gray, lane, dog, yellowtail snapper, goliath, red, gag, yellowfin grouper Coastal nursery areas for blacktip sharks, spinner sharks, Atlantic sharpnose sharks, bull sharks, sandbar sharks in the region Passes are often sites of fish spawning 	Shark species pup spring- summer Bluefin tuna are present to spawn in the spring Estuarine dependent fish migrate offshore in the fall/winter to spawn; juveniles and adults use estuaries

Species Group	Species Subgroup and Geography	Seasonal Presence
	 Common in state waters Gulf sturgeon (FT), bull shark, blacktip shark, spinner shark, silky shark, sharpnose shark, red snapper, mullet, lane snapper, red drum, gray snapper, vermillion snapper, king and Spanish mackerel, gag grouper, spotted seatrout, cobia, greater amberjack, black drum, hardheaded catfish, tarpon 	during the spring/summer
	 Offshore distributions Surface-oriented fish include hammerhead sharks, tiger sharks, silky sharks, mako sharks, manta rays, eagle rays, cownose ray, tunas, billfish, molas Whale shark hotspot near mouth of the Mississippi Bluefin tuna spawn in areas offshore of coastal Texas and Louisiana Sargassum is important habitat for juvenile of some pelagic fish species (i.e., dolphinfish, jacks, and triggerfish) 	Bluefin tuna spawn offshore Apr-May
Invertebrates	 Significant shrimp fisheries occur for white shrimp, brown shrimp, blue crabs, gulf stone crabs and oysters in coastal areas Spawning occurs offshore, larval and juvenile development occurs in estuarine waters Female blue crabs move to deeper waters to spawn 	Spawning: Brown shrimp Mar- Jul; White shrimp Apr-Nov; Blue crab peaks Aug-Sep; Oysters in late spring and early fall

The Environmental Sensitivity Index (ESI) atlases for the potentially impacted coastal areas from a leak from the *Rawleigh Warner* are generally available at each U.S. Coast Guard Sector. They can also be downloaded at: <u>http://response.restoration.noaa.gov/esi</u>. These maps show detailed spatial information on the distribution of sensitive shoreline habitats, biological resources, and human-use resources. The tables on the back of the maps provide more detailed life-history information for each species and location. The ESI atlases should be consulted to assess the potential environmental resources at risk for specific spill scenarios. In addition, the Geographic Response Plans within the Area Contingency Plans prepared by the Area Committee for each U.S. Coast Guard Sector have detailed information on the nearshore and shoreline ecological resources at risk and should be consulted.

Ecological Risk Factors

Risk Factor 3: Impacts to Ecological Resources at Risk (EcoRAR)

Ecological resources include plants and animals (e.g., fish, birds, invertebrates, and mammals), as well as the habitats in which they live. All impact factors are evaluated for both the Worst Case and the Most Probable Discharge oil release from the wreck. Risk factors for ecological resources at risk (EcoRAR) are divided into three categories:

- Impacts to the water column and resources in the water column;
- Impacts to the water surface and resources on the water surface; and
- Impacts to the shoreline and resources on the shoreline.

The impacts from an oil release from the wreck would depend greatly on the direction in which the oil slick moves, which would, in turn, depend on wind direction and currents at the time of and after the oil

release. Impacts are characterized in the risk analysis based on the likelihood of any measurable impact, as well as the degree of impact that would be expected if there is an impact. The measure of the degree of impact is based on the median case for which there is at least some impact. The median case is the "middle case" – half of the cases with significant impacts have less impact than this case, and half have more.

For each of the three ecological resources at risk categories, risk is defined as:

- The **probability of oiling** over a certain threshold (i.e., the likelihood that there will be an impact to ecological resources over a certain minimal amount); and
- The **degree of oiling** (the magnitude or amount of that impact).

As a reminder, the ecological impact thresholds are: 1 ppb aromatics for water column impacts; 10 g/m^2 for water surface impacts; and 100 g/m^2 for shoreline impacts.

In the following sections, the definition of low, medium, and high for each ecological risk factor is provided. Also, the classification for the *Rawleigh Warner* is provided, both as text and as shading of the applicable degree of risk bullet, for the WCD release of 3,000 bbl and a border around the Most Probable Discharge of 300 bbl. Please note: The probability of oiling cannot be determined using the regression curves; probability can only be determined from the 200 model runs. Thus, the modeling results and regression curves for the *R.W. Gallagher* are used to estimate the values used in the risk scoring for the **degree of oiling only**.

Risk Factor 3A: Water Column Impacts to EcoRAR

Water column impacts occur beneath the water surface. The ecological resources at risk for water column impacts are fish, marine mammals, and invertebrates (e.g., shellfish, and small organisms that are food for larger organisms in the food chain). These organisms can be affected by toxic components in the oil. The threshold for water column impact to ecological resources at risk is a dissolved aromatic hydrocarbons concentration of 1 ppb (i.e., 1 part total dissolved aromatics per one billion parts water). Dissolved aromatic hydrocarbons are the most toxic part of the oil. At this concentration and above, one would expect impacts to organisms in the water column.

Risk Factor 3A-1: Water Column Probability of Oiling of EcoRAR (not scored)

This risk factor reflects the probability that at least 0.2 mi^2 of the upper 33 feet of the water column would be contaminated with a high enough concentration of oil to cause ecological impacts. The three risk scores for water column oiling probability are:

- **Low Oiling Probability:** Probability = <10%
- Medium Oiling Probability: Probability = 10 50%
- **High Oiling Probability:** Probability > 50%

Risk Factor 3A-2: Water Column Degree of Oiling of EcoRAR

The degree of oiling of the water column reflects the total volume of water that would be contaminated by oil at a concentration high enough to cause impacts. The three categories of impact are:

• **Low Impact:** impact on less than 0.2 mi² of the upper 33 feet of the water column at the threshold level

- **Medium Impact**: impact on 0.2 to 200 mi² of the upper 33 feet of the water column at the threshold level
- **High Impact:** impact on more than 200 mi² of the upper 33 feet of the water column at the threshold level

The *Rawleigh Warner* is classified as Low Risk for degree of oiling for water column ecological resources for the WCD of 3,000 bbl because the mean volume of water contaminated was 0 mi² of the upper 33 feet of the water column. For the Most Probable Discharge of 300 bbl, the *Rawleigh Warner* is classified as Low Risk for degree of oiling because the mean volume of water contaminated was 0 mi² of the upper 33 feet of the water column.

Risk Factor 3B: Water Surface Impacts to EcoRAR

Ecological resources at risk at the water surface include surface feeding and diving sea birds, sea turtles, and marine mammals. These organisms can be affected by the toxicity of the oil as well as from coating with oil. The threshold for water surface oiling impact to ecological resources at risk is 10 g/m^2 (10 grams of floating oil per square meter of water surface). At this concentration and above, one would expect impacts to birds and other animals that spend time on the water surface.

Risk Factor 3B-1: Water Surface Probability of Oiling of EcoRAR (not scored)

This risk factor reflects the probability that at least 1,000 mi² of the water surface would be affected by enough oil to cause impacts to ecological resources. The three risk scores for oiling are:

- Low Oiling Probability: Probability = <10%
- Medium Oiling Probability: Probability = 10 50%
- **High Oiling Probability:** Probability > 50%

Risk Factor 3B-2: Water Surface Degree of Oiling of EcoRAR

The degree of oiling of the water surface reflects the total amount of oil that would affect the water surface in the event of a discharge from the vessel. The three categories of impact are:

- Low Impact: less than 1,000 mi² of water surface impact at the threshold level
- Medium Impact: 1,000 to 10,000 mi² of water surface impact at the threshold level
- **High Impact:** more than 10,000 mi² of water surface impact at the threshold level

The *Rawleigh Warner* is classified as Medium Risk for degree of oiling for water surface ecological resources for the WCD because the mean area of water contaminated in the model runs was 2,600 mi². It is classified as Low Risk for degree of oiling for the Most Probable Discharge because the mean area of water contaminated was 750 mi².

Risk Factor 3C: Shoreline Impacts to EcoRAR

The impacts to different types of shorelines vary based on their type and the organisms that live on them. For the modeled wrecks, shorelines were weighted by their degree of sensitivity to oiling. Wetlands are the most sensitive (weighted as "3" in the impact modeling), rocky and gravel shores are moderately sensitive (weighted as "2"), and sand beaches (weighted as "1") are the least sensitive to ecological impacts of oil. In this risk analysis for the *Rawleigh Warner*, shorelines have NOT been weighted by their degree of sensitivity to oiling because these data are available only for modeled vessels. Therefore, the

impacts are evaluated only on the total number of shoreline miles oiled as determined from the regression curve.

Risk Factor 3C-1: Shoreline Probability of Oiling of EcoRAR (not scored)

This risk factor reflects the probability that the shoreline would be coated by enough oil to cause impacts to shoreline organisms. The threshold for shoreline oiling impacts to ecological resources at risk is 100 g/m² (i.e., 100 grams of oil per square meter of shoreline). The three risk scores for oiling are:

- **Low Oiling Probability:** Probability = <10%
- **Medium Oiling Probability:** Probability = 10 50%
- **High Oiling Probability:** Probability > 50%

Risk Factor 3C-2: Shoreline Degree of Oiling of EcoRAR

The degree of oiling of the shoreline reflects the length of shorelines oiled by at least 100 g/m^2 in the event of a discharge from the vessel. The three categories of impact are:

- Low Impact: less than 10 miles of shoreline impacted at the threshold level
- Medium Impact: 10 100 miles of shoreline impacted at the threshold level
- **High Impact:** more than 100 miles of shoreline impacted at the threshold level

The *Rawleigh Warner* is classified as Medium Risk for degree of oiling for shoreline ecological resources for the WCD because the mean length of shoreline contaminated in the model runs was 11 miles. It is classified as Low Risk for degree of oiling for the Most Probable Discharge because the mean length of shoreline contaminated in the model runs was 4 miles.

Considering the modeled risk scores and the ecological resources at risk, the ecological risk from potential releases of the WCD of 3,000 bbl of heavy fuel oil from the *Rawleigh Warner* is summarized as listed below and indicated in the far-right column in Table 3-2:

- Water column resources Low, because little to no impacts to water column resources are likely
- Water surface resources Medium, because of the very large number of wintering, nesting, and migratory birds that use ocean, coastal, and estuarine habitats at risk, sea turtle concentrations in *Sargassum* habitat, and the persistence of tarballs that can be transported long distances. It should be noted that oil on the surface will not be continuous but rather be broken and patchy and in the form of sheens, tarballs, and streamers
- Shoreline resources Low, because most of the shoreline at risk is composed of sand beaches which are relatively easy to clean, although these beaches are used by many shorebirds for nesting and many shorebirds as wintering and migratory stopovers

Risk Factor	Risk Score		9	Explanation of Risk Score	Final Score
3A-1: Water Column Probability EcoRAR Oiling	Low	Medium	High	N/A: Only available for modeled vessels	Low
3A-2: Water Column Degree EcoRAR Oiling	Low	Medium	High	The mean volume of water contaminated above 1 ppb was 0 mi ² of the upper 33 feet of the water column	Low
3B-1: Water Surface Probability EcoRAR Oiling	Low	Medium	High	N/A: Only available for modeled vessels	Mad
3B-2: Water Surface Degree EcoRAR Oiling	Low	Medium	High	The mean area of water contaminated above 10 g/m ² was 2,500 mi ²	Med
3C-1: Shoreline Probability EcoRAR Oiling	Low	Medium	High	N/A: Only available for modeled vessels	Low
3C-2: Shoreline Degree EcoRAR Oiling	Low	Medium	High	The length of shoreline contaminated by at least 100 g/m² was 11 mi	LOW

Table 3-2: Ecological risk factor scores for the Worst Case Discharge of	f 3,000 bbl of heavy fuel oil from the
Rawleigh Warner.	

For the Most Probable Discharge of 300 bbl of heavy fuel oil, the ecological risk from potential releases from the *Rawleigh Warner* is summarized below and indicated in the far-right column in Table 3-3:

- Water column resources Low, because little to no impacts to water column resources are likely
- Water surface resources Low, because of the relatively small area of impact likely, though persist tarballs can be transported long distances. It should be noted that oil on the surface will not be continuous but rather be broken and patchy and in the form of sheens, tarballs, and streamers
- Shoreline resources Low, because of the few miles of shoreline likely at risk of oiling

Table 3-3: Ecological risk factor scores for	the Most Probable Discharge of 300 bbl of heavy fuel oil from the
Rawleigh Warner.	

Risk Factor	Risk Score		9	Explanation of Risk Score	Final Score
3A-1: Water Column Probability EcoRAR Oiling	Low	Medium	High	N/A: Only available for modeled vessels	Low
3A-2: Water Column Degree EcoRAR Oiling	Low	Medium	High	The mean volume of water contaminated above 1 ppb was 0 mi ² of the upper 33 feet of the water column	Low
3B-1: Water Surface Probability EcoRAR Oiling	Low	Medium	High	N/A: Only available for modeled vessels	
3B-2: Water Surface Degree EcoRAR Oiling	Low	Medium	High	The mean area of water contaminated above 10 g/m ² was 750 mi ²	Low
3C-1: Shoreline Probability EcoRAR Oiling	Low	Medium	High	N/A: Only available for modeled vessels	Low
3C-2: Shoreline Degree EcoRAR Oiling	Low	Medium	High	The length of shoreline contaminated by at least 100 g/m ² was 4 mi	LOW

SECTION 4: SOCIO-ECONOMIC RESOURCES AT RISK

In addition to natural resource impacts, spills from sunken wrecks have the potential to cause significant social and economic impacts. Socio-economic resources potentially at risk from oiling are listed in Table 4-1 and shown in Figures 4-1 and 4-2. The potential economic impacts include disruption of coastal economic activities such as commercial and recreational fishing, boating, vacationing, commercial shipping, and other activities that may become claims following a spill.

Socio-economic resources in the areas potentially affected by a release from the *Rawleigh Warner* include recreational beaches, state parks, and beachfront communities lining much of the Gulf of Mexico coastline. These areas are in use much of the year due to the warmer weather even in winter months.

A release could impact shipping lanes, which accommodate ports and offshore lightering areas in western Florida, Alabama, Mississippi, Louisiana, and Texas with a total of 26,000 vessel port calls and over 1.5 billion tonnage annually. Commercial fishing is economically important to the region, as well as to the nation. A release could impact fishing fleets where regional commercial landings for 2010 exceeded \$393 million.

In addition to the ESI atlases, the Geographic Response Plans within the Area Contingency Plans prepared by the Area Committee for each U.S. Coast Guard Sector have detailed information on important socio-economic resources at risk.

Spill response costs for a release of oil from the *Rawleigh Warner* would be dependent on volume of oil released and specific areas impacted. The specific shoreline impacts and spread of the oil would determine the response required and the costs for that response.

Resource Type	Resource Name	Economic Activities
National Seashores	Gulf Island National Seashore, LA	National seashores provide recreation for local and tourist populations while preserving and protecting the nation's natural shoreline treasures. National seashores are coastal areas federally designated as being of natural and recreational significance as a preserved area.
Beaches	Apalachicola, FL Dauphin Island, AL Fort Morgan, AL Fort Walton, FL Gulf Breeze, FL Gulf Shores, AL Laguna Beach, FL Orange Beach, AL Pensacola, FL	Beaches and beachfront communities form a vital part of the Gulf of Mexico coastline.
State Parks	Big Lagoon SP, FL Cypremort Point SP, LA Galveston Island SP, TX Grand Isle SP, LA Grayton Beach SP, FL	Coastal state parks are significant recreational resources for the public (e.g., swimming, boating, recreational fishing, wildlife viewing, nature study, sports, dining, camping, and amusement parks). They provide income to the states. State parks in the states of

Table 4-1: Socio-economic resources at risk from a release of oil from the Rawleigh Warner.

Resource Type	Resource Name	Economic Activities					
	Gulf SP, AL	Louisiana and Texas are potentially impacted.					
	Henderson Beach SP, FL						
	Perdido Key SP, FL						
	Sea Rim SP, TX						
	Shepard SP, MS						
National Wildlife	Shell Keys NWR (LA)	National wildlife refuges in three states may be					
Refuges	Delta NWR (LA)	impacted. These federally managed and protected lands					
	Breton NWR (LA)	provide refuges and conservation areas for sensitive					
	Grand Bay NWR (MS)	species and habitats.					
	Bon Secour NWR (AL)						
Commercial		Gulf of Mexico area and surrounding waters for commercial					
Fishing	fishing purposes.						
	Apalachicola, FL	Total Landings (2010): \$9.0M					
	Bayou La Batre, AL	Total Landings (2010): \$4.7M					
	Biloxi, MS	Total Landings (2010): \$13.0M					
	Bon Secour-Gulf Shores, AL	Total Landings (2010): \$22.5M					
	Cameron, LA	Total Landings (2010): \$11.5M					
	Delacroix-Yscloskey, LA	Total Landings (2010): \$11.7M					
	Delcambre, LA	Total Landings (2010): \$20.7M					
	Dulac-Chauvin, LA	Total Landings (2010): \$45.1M					
	Empire-Venice, LA	Total Landings (2010): \$53.7M					
	Freeport, TX	Total Landings (2010): \$9.2M					
	Galveston, TX	Total Landings (2010): \$28.0M					
	Golden Meadow-Leeville, LA	Total Landings (2010): \$21.9M					
	Grand Isle, LA	Total Landings (2010): \$14.2M					
	Gulfport-Biloxi, MS	Total Landings (2010): \$13.0M					
	Intracoastal City, LA	Total Landings (2010): \$26.4M					
	Lafitte-Barataria, LA	Total Landings (2010): \$20.4M					
	Morgan City-Berwick, LA	Total Landings (2010): \$5.7M					
	Panama City, FL	Total Landings (2010): \$6.1M					
	Pascagoula-Moss Point, MS	Total Landings (2010): \$8.9M					
	Port Arthur, TX	Total Landings (2010): \$47.4M					
Ports							
FUILS	There are a number of significant commercial ports in the western Gulf of Mexico that could potentially						
	be impacted by spillage and spill response activities. The port call numbers below are for large vessels only. There are many more, smaller vessels (under 400 GRT) that also use these ports.						
	Port Arthur, TX	1,183 port calls annually					
	Freeport, TX	777 port calls annually					
	Galveston, TX	699 port calls annually					
	Houston, TX						
		6,698 port calls annually					
	Texas City, TX	1,167 port calls annually					
	Corpus Christi, TX	1,037 port calls annually					
	Lake Charles, LA	683 port calls annually					
	Galveston Lightering Area, TX	591 port calls annually					
	Pascagoula, MS	562 port calls annually					
	Nederland Terminal, TX	389 port calls annually					
	New Orleans, LA	5,544 port calls annually					
	Loop Terminal, LA	295 port calls annually					
	Southwest Pass Lightering Area, LA	249 port calls annually					
	Gulfport, MS	197 port calls annually					
	Ingleside, TX	193 port calls annually					
	Point Comfort, TX	184 port calls annually					
	South Sabine Point Lightering Area, TX	118 port calls annually					
	Brownsville, TX	74 port calls annually					

Resource Type	Resource Name	Economic Activities
	Beaumont, TX	64 port calls annually
	Freeport Lightering Area, TX	30 port calls annually
	Corpus Christi Lightering Area, TX	26 port calls annually
	Sabine Pass, TX	235 port calls annually

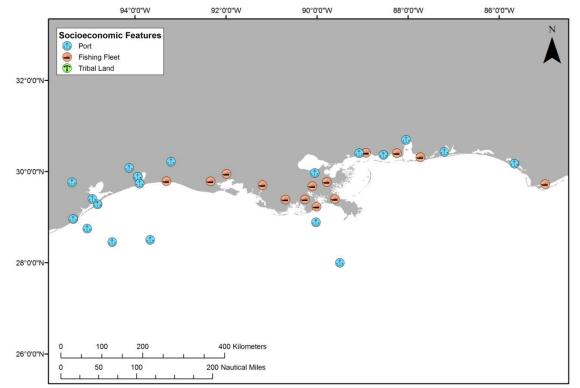


Figure 4-1: Tribal lands, ports, and commercial fishing fleets at risk from a release from the *Rawleigh Warner*. (Note that there are no tribal lands at risk.)

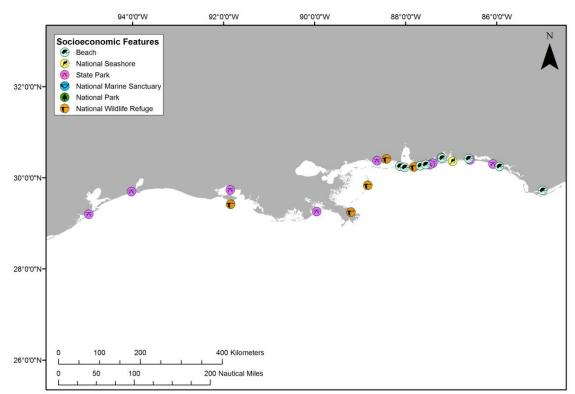


Figure 4-2: Beaches, coastal state parks, and Federal protected areas at risk from a release from the *Rawleigh Warner*.

Socio-Economic Risk Factors

Risk Factor 4: Impacts to Socio-economic Resources at Risk (SRAR)

Socio-economic resources at risk (SRAR) include potentially impacted resources that have some economic value, including commercial and recreational fishing, tourist beaches, private property, etc. All impact factors are evaluated for both the Worst Case and the Most Probable Discharge oil release from the wreck. Risk factors for socio-economic resources at risk are divided into three categories:

- Water Column: Impacts to the water column and to socio-economic resources in the water column (i.e., fish and invertebrates that have economic value);
- Water Surface: Impacts to the water surface and resources on the water surface (i.e., boating and commercial fishing); and
- Shoreline: Impacts to the shoreline and resources on the shoreline (i.e., beaches, real property).

The impacts from an oil release from the wreck would depend greatly on the direction in which the oil slick moves, which would, in turn, depend on wind direction and currents at the time of and after the oil release. Impacts are characterized in the risk analysis based on the likelihood of any measurable impact, as well as the degree of impact that would be expected if there were one. The measure of the degree of impact is based on the median case for which there is at least some impact. The median case is the

"middle case" – half of the cases with significant impacts have less impact than this case, and half have more.

For each of the three socio-economic resources at risk categories, risk is classified with regard to:

- The **probability of oiling** over a certain threshold (i.e., the likelihood that there will be exposure to socio-economic resources over a certain minimal amount known to cause impacts); and
- The **degree of oiling** (the magnitude or amount of that exposure over the threshold known to cause impacts).

As a reminder, the socio-economic impact thresholds are: 1 ppb aromatics for water column impacts; 0.01 g/m^2 for water surface impacts; and 1 g/m^2 for shoreline impacts.

In the following sections, the definition of low, medium, and high for each socio-economic risk factor is provided. Also, in the text classification for the *Rawleigh Warner*, shading indicates the degree of risk for a WCD release of 3,000 bbl and a border indicates degree of risk for the Most Probable Discharge of 300 bbl. Please note: The probability of oiling cannot be determined using the regression curves; probability can only be determined from the 200 model runs. Thus, the modeling results and regression curves for the *R.W. Gallagher* are used to estimate the values used in the risk scoring for the **degree of oiling only**.

Risk Factor 4A-1: Water Column: Probability of Oiling of SRAR (not scored)

This risk factor reflects the probability that at least 0.2 mi2 of the upper 33 feet of the water column would be contaminated with a high enough concentration of oil to cause socio-economic impacts. The threshold for water column impact to socio-economic resources at risk is an oil concentration of 1 ppb (i.e., 1 part oil per one billion parts water). At this concentration and above, one would expect impacts and potential tainting to socio-economic resources (e.g., fish and shellfish) in the water column; this concentration is used as a screening threshold for both the ecological and socio-economic risk factors.

The three risk scores for oiling are:

- **Low Oiling Probability:** Probability = <10%
- **Medium Oiling Probability:** Probability = 10 50%
- **High Oiling Probability:** Probability > 50%

Risk Factor 4A-2: Water Column Degree of Oiling of SRAR

The degree of oiling of the water column reflects the total amount of oil that would affect the water column in the event of a discharge from the vessel. The three categories of impact are:

- Low Impact: impact on less than 0.2 mi² of the upper 33 feet of the water column at the threshold level
- Medium Impact: impact on 0.2 to 200 mi² of the upper 33 feet of the water column at the threshold level
- **High Impact:** impact on more than 200 mi² of the upper 33 feet of the water column at the threshold level

The *Rawleigh Warner* is classified as Low Risk for degree of oiling for water column socio-economic resources for the WCD of 3,000 bbl because the mean volume of water contaminated in the model runs was 0 mi² of the upper 33 feet of the water column. For the Most Probable Discharge of 300 bbl, the *Rawleigh Warner* is classified as Low Risk for degree of oiling because the mean volume of water contaminated was 0 mi² of the upper 33 feet of the water column.

Risk Factor 4B-1: Water Surface Probability of Oiling of SRAR (not scored)

This risk factor reflects the probability that at least 1,000 mi² of the water surface would be affected by enough oil to cause impacts to socio-economic resources. The three risk scores for oiling are:

- **Low Oiling Probability:** Probability = <10%
- **Medium Oiling Probability:** Probability = 10 50%
- **High Oiling Probability:** Probability > 50%

The threshold level for water surface impacts to socio-economic resources at risk is 0.01 g/m^2 (i.e., 0.01 grams of floating oil per square meter of water surface). At this concentration and above, one would expect impacts to socio-economic resources on the water surface.

Risk Factor 4B-2: Water Surface Degree of Oiling of SRAR

The degree of oiling of the water surface reflects the total amount of oil that would affect the water surface in the event of a discharge from the vessel. The three categories of impact are:

- Low Impact: less than 1,000 mi² of water surface impact at the threshold level
- Medium Impact: 1,000 to 10,000 mi² of water surface impact at the threshold level
- **High Impact:** more than 10,000 mi² of water surface impact at the threshold level

The *Rawleigh Warner* is classified as Medium Risk for degree of oiling for water surface socio-economic resources for the WCD of 3,000 bbl because the mean area of water contaminated in the model runs was 2,600 mi². The *Rawleigh Warner* is classified as Low Risk for degree of oiling for water surface socio-economic resources for the Most Probable Discharge because the mean area of water contaminated was 750 mi².

Risk Factor 4C: Shoreline Impacts to SRAR

The impacts to different types of shorelines vary based on economic value. For the modeled wrecks, shorelines have been weighted by their degree of sensitivity to oiling. Sand beaches are the most economically valued shorelines (weighted as "3" in the impact analysis), rocky and gravel shores are moderately valued (weighted as "2"), and wetlands are the least economically valued shorelines (weighted as "1"). In this risk analysis for the *Rawleigh Warner*, shorelines have NOT been weighted by their degree of sensitivity to oiling because these data are available only for modeled vessels. Therefore, the impacts are evaluated only on the total number of shoreline miles oiled as determined from the regression curve.

Risk Factor 4C-1: Shoreline Probability of Oiling of SRAR (not scored)

This risk factor reflects the probability that the shoreline would be coated by enough oil to cause impacts to shoreline users. The threshold for impacts to shoreline SRAR is 1 g/m^2 (i.e., 1 gram of oil per square meter of shoreline). The three risk scores for oiling are:

- **Low Oiling Probability:** Probability = <10%
- **Medium Oiling Probability:** Probability = 10 50%
- **High Oiling Probability:** Probability > 50%

Risk Factor 4C-2: Shoreline Degree of Oiling of SRAR

The degree of oiling of the shoreline reflects the total amount of oil that would affect the shoreline in the event of a discharge from the vessel. The three categories of impact are:

- Low Impact: less than 10 miles of shoreline impacted at threshold level
- Medium Impact: 10 100 miles of shoreline impacted at threshold level
- High Impact: more than 100 miles of shoreline impacted at threshold level

The *Rawleigh Warner* is classified as Medium Risk for degree of oiling for shoreline socio-economic resources for the WCD because the mean length of shoreline contaminated in the model runs was 34 miles. It is classified as Medium Risk for degree of oiling for the Most Probable Discharge because the mean length of shoreline contaminated in the model runs was 25 miles.

Considering the modeled risk scores and the socio-economic resources at risk, the socio-economic risk from potential releases of the WCD of 3,000 bbl of heavy fuel oil from the *Rawleigh Warner* is summarized as listed below and indicated in the far-right column in Table 4-2:

- Water column resources Low, because there would be virtually no impact on the water column in important fishing grounds
- Water surface resources Medium, because a moderate area of surface water would be impacted in shipping lanes and areas of other offshore activity. It should be noted that oil on the surface will not be continuous but rather be broken and patchy and in the form of sheens, tarballs, and streamers
- Shoreline resources Medium, because a moderate length of shoreline would be impacted in high-value areas and shoreline cleanup in wetlands can be difficult

Risk Factor	Risk Score		9	Explanation of Risk Score	Final Score
4A-1: Water Column Probability SRAR Oiling	Low	Medium	High	N/A: Only available for modeled vessels	Law
4A-2: Water Column Degree SRAR Oiling	Low	Medium	High	The mean volume of water contaminated above 1 ppb was 0 mi ² of the upper 33 feet of the water column	Low
4B-1: Water Surface Probability SRAR Oiling	Low	Medium	High	N/A: Only available for modeled vessels	Mad
4B-2: Water Surface Degree SRAR Oiling	Low	Medium	High	The mean area of water contaminated above 0.01 g/m ² was 2,600 mi ²	Med
4C-1: Shoreline Probability SRAR Oiling	Low	Medium	High	N/A: Only available for modeled vessels	Mod
4C-2: Shoreline Degree SRAR Oiling	Low	Medium	High	The length of shoreline contaminated by at least 1 g/m ² was 34 mi	Med

 Table 4-2: Socio-economic risk factor ranks for the Worst Case Discharge of 3,000 bbl of heavy fuel oil from the Rawleigh Warner.

For the Most Probable Discharge of 300 bbl, the socio-economic risk from potential releases of heavy fuel oil from the *Rawleigh Warner* is summarized as listed below and indicated in the far-right column in Table 4-3:

- Water column resources Low, because there would be virtually no impact on the water column in important fishing grounds
- Water surface resources Low, because a small area of surface water would be impacted in shipping lanes and areas of other offshore activity. It should be noted that oil on the surface will not be continuous but rather be broken and patchy and in the form of sheens, tarballs, and streamers
- Shoreline resources Medium, because a moderate length of shoreline would be impacted in high-value areas and shoreline cleanup in wetlands can be difficult

 Table 4-3: Socio-economic risk factor ranks for the Most Probable Discharge of 300 bbl of heavy fuel oil from the Rawleigh Warner.

Risk Factor	Risk Score)	Explanation of Risk Score	Final Score
4A-1: Water Column Probability SRAR Oiling	Low	Medium	High	N/A: Only available for modeled vessels	Low
4A-2: Water Column Degree SRAR Oiling	Low	Medium	High	The mean volume of water contaminated above 1 ppb was 0 mi ² of the upper 33 feet of the water column	Low
4B-1: Water Surface Probability SRAR Oiling	Low	Medium	High	N/A: Only available for modeled vessels	
4B-2: Water Surface Degree SRAR Oiling	Low	Medium	High	The mean area of water contaminated above 0.01 g/m ² was 750 mi ²	Low
4C-1: Shoreline Probability SRAR Oiling	Low	Medium	High	N/A: Only available for modeled vessels	Med
4C-2: Shoreline Degree SRAR Oiling	Low	Medium	High	The length of shoreline contaminated by at least 1 g/m ² was 25 mi	Med

SECTION 5: OVERALL RISK ASSESSMENT AND RECOMMENDATIONS FOR ASSESSMENT, MONITORING, OR REMEDIATION

The overall risk assessment for the *Rawleigh Warner* is comprised of a compilation of several components that reflect the best available knowledge about this particular site. Those components are reflected in the previous sections of this document and are:

- Vessel casualty information and how site formation processes have worked on this vessel
- Ecological resources at risk
- Socio-economic resources at risk
- Other complicating factors (war graves, other hazardous cargo, etc.)

Table 5-1 summarizes the screening-level risk assessment scores for the different risk factors, as discussed in the previous sections. As noted in Sections 3 and 4, each of the ecological and socioeconomic risk factors each has two components, probability and degree. Of those two, degree is given more weight in deciding the combined score for an individual factor, e.g., a high probability and medium degree score would result in a medium overall for that factor. Please note: The probability of oiling cannot be determined using the regression curves; probability can only be determined from the 200 model runs. Thus, the modeling results and regression curves for the *R.W. Gallagher* were used to estimate the values used in the risk scoring for the **degree of oiling only**.

In order to make the scoring more uniform and replicable between wrecks, a value was assigned to each of the 7 criteria. This assessment has a total of 7 criteria (based on table 5-1) with 3 possible scores for each criteria (L, M, H). Each was assigned a point value of L=1, M=2, H=3. The total possible score is 21 points, and the minimum score is 7. The resulting category summaries are:

Low Priority	7-11
Medium Priority	12-14
High Priority	15-21

For the Worst Case Discharge, the *Rawleigh Warner* scores Low with 11 points; for the Most Probable Discharge, the *Rawleigh Warner* scores Low with 9 points. Under the National Contingency Plan, the U.S. Coast Guard and the Regional Response Team have the primary authority and responsibility to plan, prepare for, and respond to oil spills in U.S. waters. Based on the technical review of available information, NOAA proposes the following recommendations for the *Rawleigh Warner*. The final determination rests with the U.S. Coast Guard.

Rawleigh Warner	Possible NOAA Recommendations				
	Wreck should be considered for further assessment to determine the vessel condition, amount of oil onboard, and feasibility of oil removal action				
	Location is unknown; Use surveys of opportunity to attempt to locate this vessel and gather more information on the vessel condition				
	Conduct active monitoring to look for releases or changes in rates of releases				
1	Be noted in the Area Contingency Plans so that if a mystery spill is reported in the general area, this vessel could be investigated as a source				
1	Conduct outreach efforts with the technical and recreational dive community as well as commercial and recreational fishermen who frequent the area, to gain awareness of changes in the site				

Vessel Risk Factors		Data Quality Score	Comments		Risk Score	
Pollution Potential Factors	A1: Oil Volume (total bbl)	Medium	Maximum of 2,900 bbl, not reported to be le	aking		
	A2: Oil Type	High	Bunker fuel is a heavy fuel oil, a Group IV oil type		Med	
	B: Wreck Clearance	High	Vessel not reported as cleared			
	C1: Burning of the Ship	High	Significant fire was reported			
	C2: Oil on Water	High	Oil was reported on the water; amount is not known			
	D1: Nature of Casualty	High	Multiple torpedo detonations			
	D2: Structural Breakup	Low	Unknown structural breakup			
Archaeological Assessment	Archaeological Assessment	Medium	Detailed sinking records of this ship exist but no site reports exist, assessment is believed to be moderately accurate		Not Scored	
Operational Factors	Wreck Orientation	Low	Unknown			
	Depth	Low	>250 ft		Not Scored	
	Visual or Remote Sensing Confirmation of Site Condition	Low	Location unknown			
	Other Hazardous Materials Onboard	High	No			
	Munitions Onboard	High	No			
	Gravesite (Civilian/Military)	High	Yes	-		
	Historical Protection Eligibility (NHPA/SMCA)	High	NHPA and possibly SMCA			
				WCD	Most Probable	
Ecological Resources	3A: Water Column Resources	High	Area of water column affected above thresholds are relatively small	Low	Low	
	3B: Water Surface Resources	High	Heavy fuel oil forms persistent tarballs that can travel long distances posing risks to birds and sea turtles, esp. when concentrated in convergence zones and <i>Sargassum</i>	Med	Low	
	3C: Shore Resources	High	Few miles of mostly sand beach at risk	Low	Low	
Socio- Economic Resources	4A: Water Column Resources	High	Virtually no impact on the water column in important fishing grounds	Low	Low	
	4B: Water Surface Resources	High	Moderate to small area of surface water could be impacted in shipping lanes and areas of other offshore activity	Med	Low	
	4C: Shore Resources	High	Moderate length of shoreline could be impacted in high-value areas and shoreline cleanup in wetlands can be difficult	Med	Med	
Summary Risk S	cores			11	9	

 Table 5-1: Summary of risk factors for the Rawleigh Warner.